


1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A2	ALL	
V	OPEN	
	OPEN	
	CLOSED	

**NOTES:**

1. RATING: 1A 125VAC / 250VAC
2. CONTACT RESISTANCE : 30mohms Max.
3. INSULATION RESISTANCE : DC 500V 100Mohms Min.
4. DIELECTRIC STRENGTH : AC 1000V 1 minute
5. ELECTRICAL LIFE : 5000 cycle min.
6. MECHANICAL LIFE : 10,000 cycle min.
7. PUSH FORCE : >0.3kg

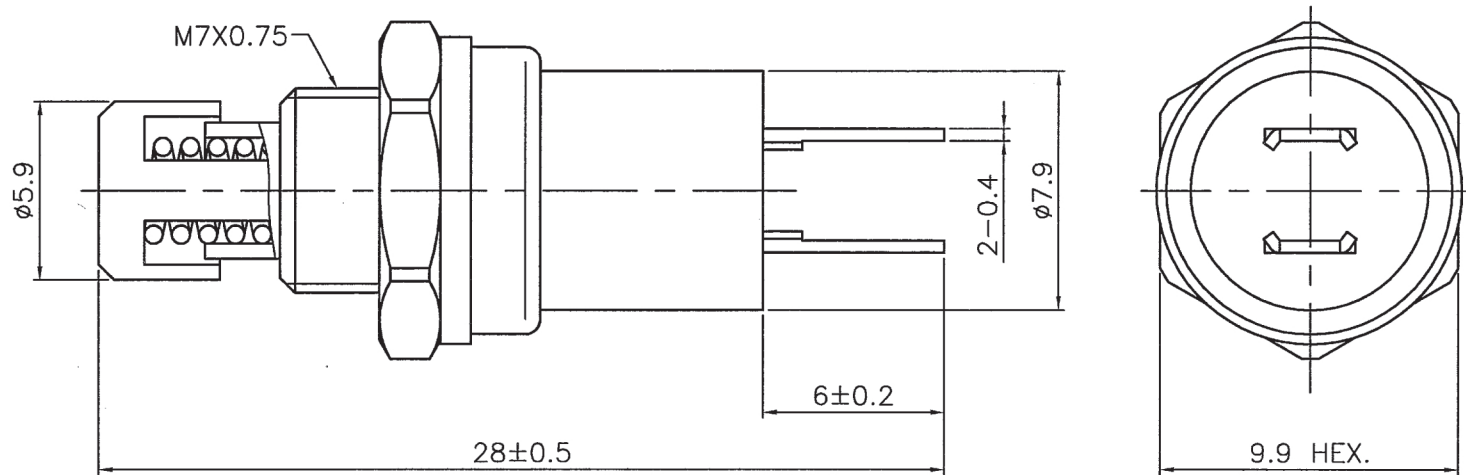

8	(TERMINAL)	BROZE	(SILVER)	2	
7	(INSULATOR)	PA	(NICKEL)	1	
6	(STOP RING)	BRASS	(NICKEL)	1	
5	(SPRING WASHER)	IRON	(NICKEL)	1	
4	(NUT)	IRON	(NICKEL)	1	
3	(SLEEVE)	BRASS	(NICKEL)	1	
2	(SPRING)	STEEL	(NICKEL)		
1	(PUSH BUTTON)	ABS	(BLACK)	1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED  
 TOLERANCES  
 ANGLES = ±5°  
 UP TO 6 = ±0.2  
 6-40 = ±0.4  
 40-120 = ±0.6  
 120-315 = ±1  
 ABOVE 315 = ±1.6

THIRD\_ANGLE

SCALE 4/1

APPROVED:	DATE	2012-09-25
CHECKED	DATE	2012-09-25
DRAWN	DATE	2012-09-25
FILE NO. D:\CAD\ISS	5121010013_SS-326-1-BK_CA001A2	
ERP LINK:	5121010013	

**ALTRONICS**

TITLE Single pole single throw (SPST)  
 Momentary pushbutton switch

PART NO. S 1071

REV. A2

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8