




P 8216 - REWIREABLE PLUG (3-Pin AU type)

INSTRUCTION MANUAL


 BY LAW IN AUSTRALIA, THIS PRODUCT FALLS UNDER THE 'DON'T D.I.Y.' CATEGORISATION OF ELECTRICAL ARTICLES.]

Stripping dimensions (actual size shown)

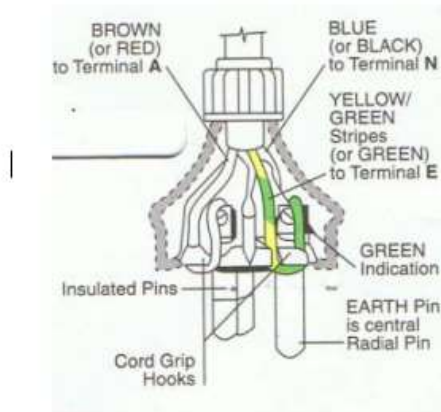

SAFETY PRECAUTIONS

ENSURE EARTH WIRE WITH GREEN/YELLOW STRIPES (OR ALL GREEN) IS CONNECTED TO EARTH TERMINAL MARKED 'E' AND WITH GREEN INDICATION.

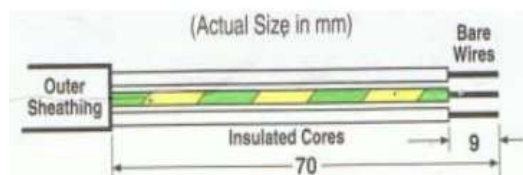

shrinkable tube length is 35mm

INSIDE THE PACKAGE: 1x piece of each - AU Certified 3-pin plug, Clear plastic protective cover, grey cord grip nut, plastic cover tube.

FIGURE 2: Pieces inside the package.



WIRING INSTRUCTIONS:

1. SLIP CORD GRIP NUT (SMALL END FIRST) AND PLASTIC COVER TUBE OVER THE FLEXIBLE BARE WIRE ENDS POWER CORD.
2. CONNECT EARTH WIRE WITH GREEN/YELLOW STRIPE (OR ALL GREEN) TO EARTH TERMINAL MARKED "E" AND WITH GREEN INDICATOR. FOLLOW THE WIRE STRIPPING GUIDELINES IN FIGURE 1 ABOVE.

3. CONNECT BROWN (OR RED) WIRE TO ACTIVE TERMINAL MARKED "A". AND SCREW THE CABLE CRIMPER TIGHTLY TO ENSURE THE CABLE IS CRIMPED FIRMLY.
4. CONNECT BLUE (OR BLACK) WIRE TO NEUTRAL TERMINAL MARKED "N".
5. ENSURE ALL WIRES ARE SECURELY LOOPED UNDER CORD GRIP HOOKS, AND ALL THREE SCREWS FIRMLY TIGHTENED.
6. **DOUBLE CHECK THAT THE EARTH WIRE IS FIXED TO EARTH TERMINAL MARKED "E". (SEE STEP 2)**
7. TO FINALISE ASSEMBLY - USE A SCREWDRIVER TO PRESS THE SOCKET PART TO FIT COVER AND TIGHTEN CORD-GRIP NUT. (SEE FIG. 3)
8. TO DISASSEMBLE IF NEEDED – (REVERSE STEP 8) LOOSE THE CORD-GRIP NUT AND USE A FLAT SCREWDRIVER TO PRY THE PVC COVER TO DETACH THE SOCKET.

Figure 3: AU Plug Assembly / Disassembly:



CABLE SIZE AS FOLLOWS:

APPROVED MODEL CODE	Suitable Flexible cord	Nominal area of conductor (mm ²)	Cord diameter (mm)
HWRP10CL Rewireable Plug (250V~, 10A)	3-Core Circular Ordinary Duty	0.75 OR 1.0	MIN. 8 - MAX. 10.3

NOT FIELD SERVICEABLE.

Distributed by Altronic Distributors Pty. Ltd.

174 Roe St, Perth. Western Australia.

Phone: 08 9428 2199

Internet: www.altronics.com.au