


Sub Miniature Toggle Switches continued.

Salecom® 90° SPDT Sub-Miniature Toggle

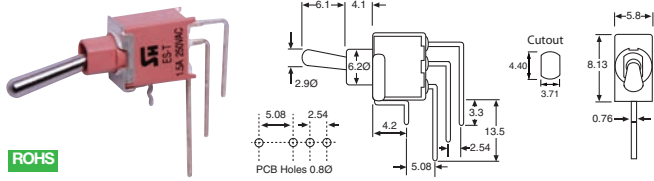


ROHS

Price Each	RRP	10+	40+
S 1421 SPDT Vertical PCB mount	3.35	3.00	2.65

Sub Miniature Push Button Switches


Salecom® 90° SPDT Momentary Sub-Miniature Push Button

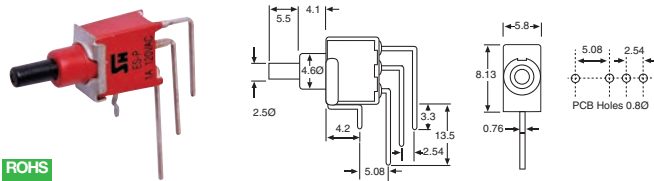

ROHS

Price Each	RRP	10+	40+
S 1498 SPDT Vertical PCB mount	3.95	3.60	3.25


Salecom® SPDT Momentary Sub-Miniature Push Button

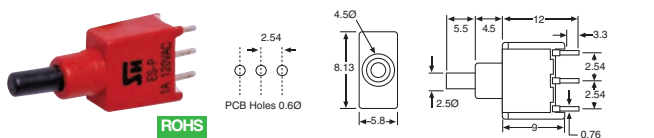

ROHS

Price Each	RRP	10+	40+
S 1493 SPDT PCB mount	3.35	3.00	2.65

Salecom® 90° SPDT Momentary Sub-Miniature Push Button

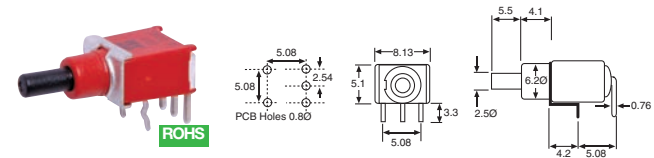

ROHS

Price Each	RRP	10+	40+
S 1495 SPDT Horizontal PCB mount	3.35	3.00	2.65

Caps To Suit Sub-Miniature (S 1400 Series) Push Buttons

ROHS



S 1481 5mm overall diameter, 4mm height.  
S 1482 7.5mm overall diameter, 4mm height.  
To suit S 1493, S 1495, S 1498

Price Each	RRP	10+	40+
S 1481 Black small push button	0.50	0.45	0.40
S 1482 Black large push button	0.50	0.45	0.40

Miniature Push Button Switches


GENERAL SPECIFICATIONS S 1391 - S 1398

Contact rating: 0.5A @ 250V AC or 28V DC resistive load  
Electrical life: 50,000 cycles at full load  
Contact resistance: 10mΩ max. initial at 24V DC @ 100mA  
Insulation resistance: 1,000 MΩ min.  
Dielectric strength: 1000V RMS at sea level  
Operating temperature: -30°C to 85°C  
All Threaded Push Buttons supplied with 1 x star washer, 1 x flat locking washer, 2 x nuts and 9.5mmØ black cap. Non Threaded Push Buttons supplied with 9.5mmØ black cap.

Salecom® Momentary Push Button



ROHS

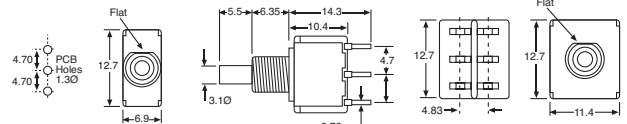

S 1391 & S 1393 Dimension


S 1392 Dimension

Price Each	RRP	10+	40+
S 1391 SPDT Solder tail	5.45	4.90	4.35
S 1392 DPDT Solder tail	6.50	5.80	4.95
S 1393 SPDT PCB mount	5.45	4.90	4.35

Salecom® SPDT 90° PCB Mount Momentary Push Button



ROHS

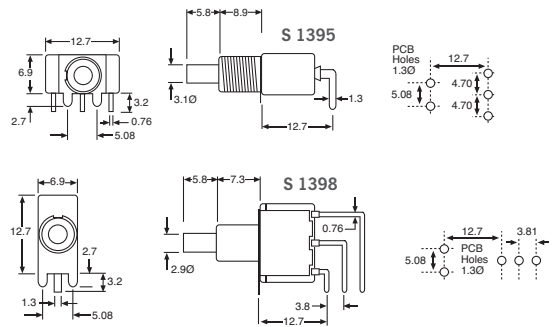

Price Each	RRP	10+	40+
S 1395 SPDT Low profile PCB mount	6.75	6.10	5.40
S 1398 SPDT Upright PCB mount	6.75	6.10	5.40

Nuts & Caps To Suit S 1300 Series Salecom® Switches



ROHS

Price Each	RRP	10+	40+
S 1300 Dress nut & cap suits push-button switches	0.80	0.70	0.65
S 1399 Cap 9.5mmØ suits push-button switches	0.50	0.45	0.40
S 1403 Cap 7.8mmØ suits push-button switches	0.50	0.45	0.40
S 1301 Dress nut to suit threaded miniature toggle switches	0.75	0.70	0.60

SPST Momentary Miniature Push Button



ROHS

Contact rating: 0.3A @ 125V AC  
Contact resistance: <50mΩ  
Mounting hole: 7mmØ  
Solderability: 230°C (3secs.)

Price Each	RRP	10+	40+
S 1060B SPST Red normally open	1.60	1.40	1.25
S 1071A SPST Black normally closed	1.60	1.40	1.25

Get a VIP-Trade card & save!

VIP-Trade customers are entitled to the purple price listed in this catalogue, regardless of quantity purchased. In many cases this discount can be up to 40% off the RRP. To become a VIP-Trade customer you must provide use with your ABN and register for an account.

Download an application form at [www.altronics.com.au](http://www.altronics.com.au)

