



Operating Manual

A 4370 125 Watt Power Amplifier

A 4380 250 Watt Power Amplifier

OVERVIEW

These Redback 125W and 250W power amplifiers are ideal for installations requiring high power zone amplifiers. Ideally suited for use in shopping centres, pedestrian precincts, public transport facilities and convention centres.

FEATURES

- Robust design incorporating latest Mosfet technology
- Very Low noise and distortion
- 70V, 100V and 4-16Ω outputs
- 240V AC or 24V DC operation
- 24V DC @ 1 Amp output for external devices
- Multi stage thermally cued fan cooling
- Output Peak Limited
- Thermal Overload protected
- Signal Presence Indicators
- Fault Indicators
- Power Status Indicators
- Rack Mountable (suits 19 inch racks)

POWER SUPPLY

The amplifier operates on 230V AC or 24V DC primarily for battery backup operation. Ensure power is switched OFF at the front panel before connecting either mains power to the IEC socket or 24V DC to the screw terminal input. (see Fig 2 for more details) As high currents may be drawn when operating from a 24V DC supply confirm the capacity of the DC power supply used.

AUDIO CONNECTIONS

Audio input is via a 3 pin XLR socket on the rear of the amplifier. This is a 500mV line level balanced signal which is normally fed from a mixer panel. Pinout details are printed on the rear of the amplifier. A balanced Line Out XLR socket is also provided on the rear of the amplifier for passing the audio signal on to more slave amplifiers if required. The amplifier output level control is also rear mounted to prevent tampering or accidental adjustment (see Fig 2 for more details).

SPEAKER CONNECTIONS

Speakers with a total impedance of 4-16Ω may be connected to the terminals marked 4-16Ω on the rear of the amplifier. Speakers fitted with line transformers (either 70V or 100V) may be connected to the corresponding terminals on the rear of the amplifier. Always ensure the total load of the fitted speakers does not exceed the rated output of the amplifier otherwise damage may result. When fitting speakers with line transformers the impedance of the load cannot be measured using a standard multimeter. An impedance meter is required. Fig 1 lists the impedance at certain loads of speakers fitted with 70V and 100V line transformers. So for a total load of 250 watts using 100V line transformer fitted speakers the impedance of the speaker load should be 40Ω.



About 70V & 100V Line Speaker Systems

Wiring speakers in parallel for 70/100V line: Where several speakers are to be used at one time, on one circuit, it becomes necessary to use speakers fitted with line-matching transformers. This is to overcome the effects of connecting speakers in parallel and cable losses. The amplifier generally has an output voltage of 100 volts (70 volts is typically used in North America, however operation is similar). In this configuration the total wattage load on the amplifier is derived from adding all the line transformer primary tap ratings together. For example, 70 one watt speakers will have a total speaker load of 70 watts. Or alternatively, it is conceivable to connect 100 one watt speakers to a 100 watt, 100 volt line amplifier.

Measuring 70/100V Line Speaker Impedance: To measure amplifier system load, you must use an impedance meter in order to measure the ac resistance of the connected speaker network. Impedance cannot be measured with a standard multimeter, as this measures the dc resistance. Use the Altronics Q 2001 or similar impedance meter.

| Load | 70V | 100V |
|-------|--------|-------|
| 0.5W | 9.4kΩ | 20kΩ |
| 0.66W | 7.12kΩ | 15kΩ |
| 1W | 4.7kΩ | 10kΩ |
| 1.25W | 3.76kΩ | 8kΩ |
| 2W | 2.35kΩ | 5kΩ |
| 2.5W | 1.88kΩ | 4kΩ |
| 3W | 1.56kΩ | 3.3kΩ |
| 5W | 940Ω | 2kΩ |
| 7.5W | 626Ω | 1.3kΩ |
| 10W | 470Ω | 1kΩ |
| 15W | 313Ω | 666Ω |
| 20W | 235Ω | 500Ω |
| 30W | 156Ω | 333Ω |
| 40W | 117Ω | 250Ω |
| 60W | 78Ω | 166Ω |
| 100W | 47Ω | 100Ω |
| 125W | 37Ω | 80Ω |
| 250W | 19Ω | 40Ω |
| 500W | 9.4Ω | 20Ω |

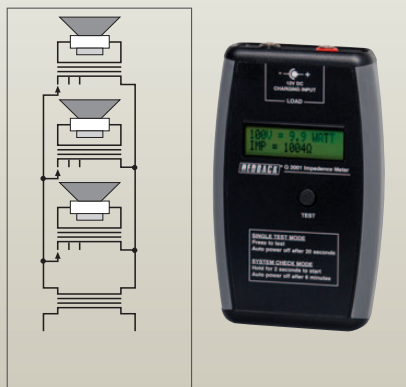


Fig 1

24V DC OUTPUT

A constant 24V output terminal has been provided to power ancillary 24V devices (see Fig 2 for more details). The output has a maximum current draw of 1 amp. If more than 1 amp is drawn from the output, internal polyswitches will disconnect the output. These will reset once the current draw is reduced.

TROUBLE SHOOTING

If the REDBACK Phase 4 amplifier fails to deliver the rated performance, check the following:

No Power, No Lights

Make sure amplifier power switch is on. Make sure mains power switch is on at the wall. Check the mains and DC fuse. Replace with only the correct type and rating. Over rated fuses will invalidate warranty.

Distorted Output

Check that the speaker type is correct for the output that you are using (ie. 4-16Ω, 70V or 100V line). Check for any short circuits on the speaker line.

Very Low Output Volume

Make sure that the input is the correct level (check for shorted connectors). Check for any short circuits on the speaker line.

Check if signal LED on the front panel is lit to indicate there is signal. If it is not lit there is no signal present.

Continually Blows Fuses

Make sure that the speaker line is not shorted. Check speaker types, ratings and if on correct output.

Amplifier Keeps on Cutting In & Out

Make sure that there is adequate ventilation around the amplifier. Check the vent slots on the front, top and sides are not covered or blocked and the fan on the rear is functioning correctly. Check also speaker types, ratings and for any short circuits on the speaker line.

No Output From 24V DC

Make sure the 24V DC Out connector is wired correctly.

Fig 2 shows a typical install where the A 4370 amplifiers are used as slave amplifiers with the audio output from the mixer amplifier passed through each slave amplifier.

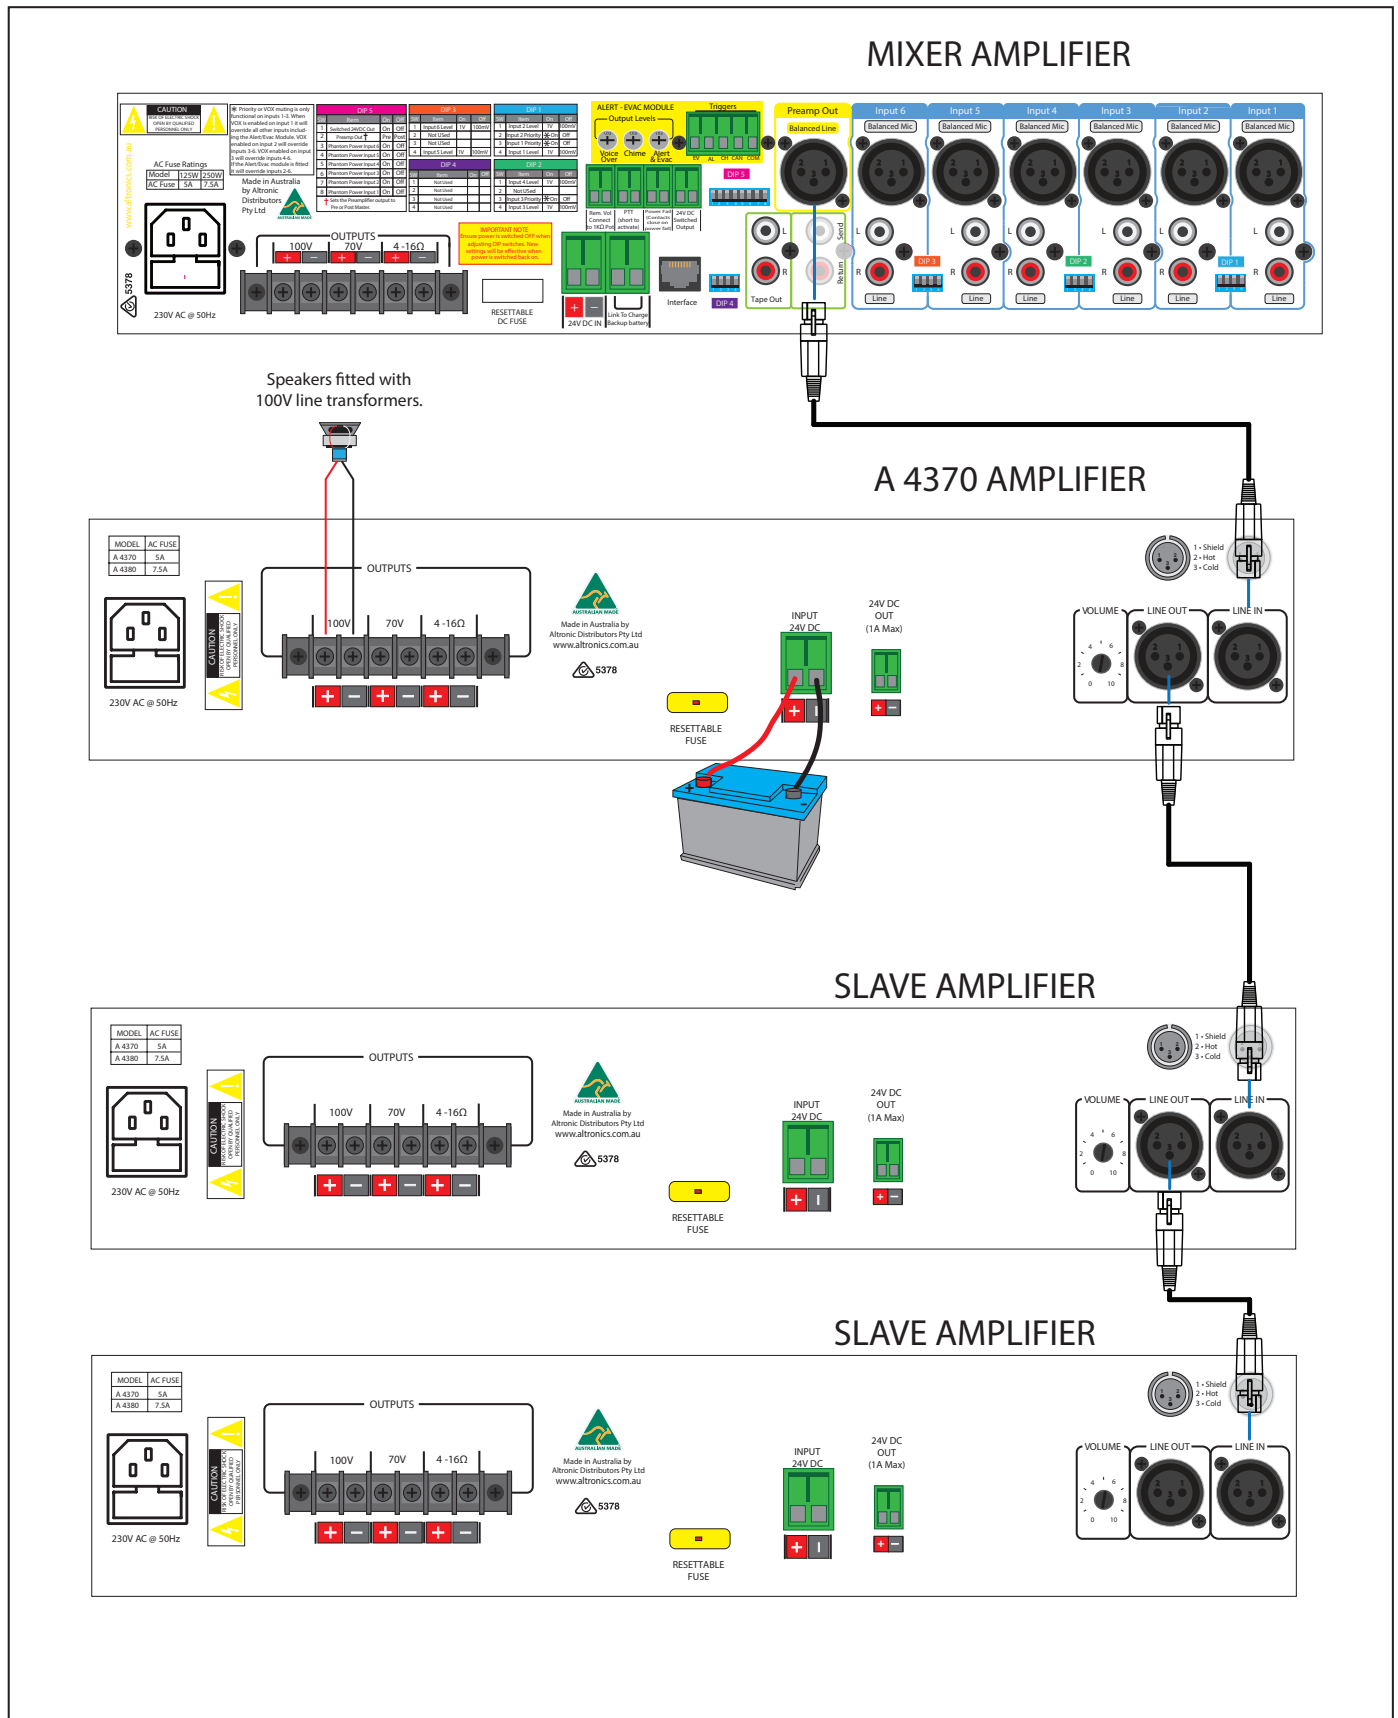


Fig 2

SPECIFICATIONS Measurements referenced to 1kHz.

| | |
|-----------------------|---|
| Power output: | A 4370- 125 W RMS,A 4380-250W RMS |
| Distortion: | < 0.5%, @ 1kHz |
| Frequency response | 50Hz - 15kHz, -3dB |
| Output line: | 100V, 70V, or 4 - 16Ω |
| Signal to noise ratio | (peak limiting by-passed) > 90 dB |
| Line output: | 600Ω balanced, 0dBV, 3 pin XLR |
| Speaker connection | Screw terminals |
| 24V DC output: | Screw terminals |
| Inputs: | 3 pin XLR (500mV) |
| 24V-30V dc power: | Screw terminals |
| 240V ac power: | IEC power connector |
| Indicators: | Mains, 24V dc, Power, Signal presence, Over temp, Over current, Shut down, Peak limiting |
| Current Draw: | A 4370 - 250mA Standby, 8A Full @ 24V dc |
| Current Draw: | A 4380 - 250mA Standby, 17A Full @ 24V dc |
| Power supply: | 240V ac or 24V dc (nominal) |
| Protection: | A 4370 - 5A ac and 10A dc fuse A 4380 - 7.5A ac and 20A dc fuse |
| Dimensions: | ≈ 483W x 340D x 88H |
| Input Impedance: | ≈ 10KΩ |

***Specifications subject to change without notice**

REDBACK is a registered trademark of Altronic Distributors Pty Ltd

Since 1976 Redback amplifiers have been manufactured in Perth, Western Australia by Altronics. With over 40 years experience in the commercial audio industry, we offer consultants, installers and end users reliable products of high build quality with local product support. We believe there is significant added value for customers when purchasing an Australian made Redback® amplifier or PA product

Australian Made Status

All Redback® house products made by Altronics will now be sporting the official Australian Made logo. Since starting manufacturing of commercial audio equipment in the mid 70's we have always taken pride in producing a quality local product.

The new adoption of the Australian Made logo will help us get the word out to local and export markets that our products carry the official compliance seal of the Australian Made campaign. We have always pushed our 'local is better' line in all of our marketing efforts, it's always an added boost when you are backed up by a widely recognised and respected icon.

Industry leading 10 year warranty.

There's a reason we have the industry leading DECADE warranty. It's because of a long tried and tested history of bullet-proof reliability. We've heard PA contractors tell us they still see the original Redford amplifier still in service in schools - that's over 40 years of operation - and still going strong!

Should a product become faulty please contact us to obtain a return authorisation number. Please ensure you have all the relevant documentation on hand. We do not accept unauthorised returns. Proof of purchase is required so please retain your invoice.

Distributed by Altronic Distributors Pty. Ltd.

Phone: 1300 780 999 Fax: 1300 790 999 Internet: www.altronics.com.au