

Column Speakers

C 0957A

40W 100V/8 Ohm IP66 Rated Sound Column Speaker

Overview

These stylish, compact column speakers utilise multiple 3.5" (89mm) woofers and high power dome tweeters to produce superb clarity for both music and speech applications. Ideally suited for use in places of worship, lecture theatres, auditoriums, gymnasiums and school assembly areas. Their IP66 weatherproof construction makes them also suitable for installations in exposed areas, such as train platforms & pedestrian precincts. These Redback column speakers will provide excellent all-round performance while remaining architecturally unobtrusive

Features

- Durable extruded aluminium housing
- Attractive slimline construction
- Fitted with high performance drivers for exceptional speech intelligibility & music reproduction
- Suitable for accurate, "long throw" applications
- Water protected to IEC529 IP66, suitable for indoor and outdoor use
- Durable aluminium alloy bracket (tested up to 1500 kgf).
- Multi-core cable tap selection
- Available in White (RAL 9003)

Installation

The sound columns include a high grade multitap transformer allowing several power taps plus a low impedance setting. These are selected by connecting the multi-core cabling to the appropriate colour for the desired wattage.

C 0957A: red: common, white: 40W, blue: 20W, yellow: 10W, green: positive 8 Ohm, brown: negative 8 Ohm.

A heavy duty, diecast aluminium mounting bracket is included. This allows both horizontal and vertical adjustment, ensuring sound is directed where needed.

About Redback® Speaker Drivers

Each custom designed speaker and transformer combination has been specifically engineered to ensure a wide frequency range and dispersion angle, plus a high sound pressure level (SPL) ensuring excellent music and speech intelligibility; which is highly desirable for emergency paging applications.


Testing

Redback® drivers are subject to strenuous factory testing reducing the risk of unit failure or performance reduction over time. Each driver has a power rating well above the max tapping of the transformer, ensuring reliable operation and excellent longevity.

REDBACK®



Dimensions

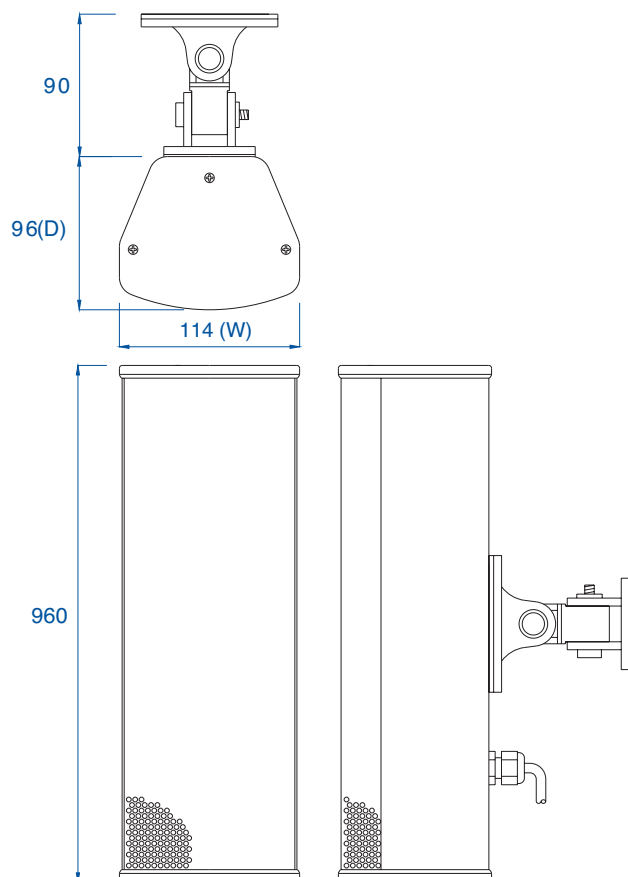

Column Speakers

C 0957A

40W 100V/8 Ohm IP66 Rated
Sound Column Speaker



Specifications

Electrical	
Speakers	4x89mm Woofer / 1x83mm Tweeter
Power Taps	10, 20, 40W, 4Ω
SPL 1W @ 1m	93dB @ 1kHz (+/-2dB)
Max SPL @ 1m	109dB (+/-2dB)
Frequency response	75Hz - 15kHz
Dispersion 1kHz/4kHz	Hor: 180°/90°, Vert: 30°/20°
Weight	7.7kg
Dimensions	960L x 114W x 96Dmm
Mechanical	
Housing Material	Aluminium
Grille Material	Aluminium
Mounting Bracket	Aluminium, Stainless steel fixings
Protection	IEC529, IP66 rated
Colour	White (RAL9003)
Connection	Multi-core cable
Environmental	
Operating Temperature	-25°C to +65°C
Relative Humidity	<95%

Transformer Detail

