


H 0478 SPECIFICATIONS

High impact ABS Polycarbonate material :  
 Moulded In : Light Grey.  
 Operating temperature : -400C to 1200C  
 Suggested Operating Temperature : -200C to 800C  
 Dimensions: 171 x 121 x 55mm

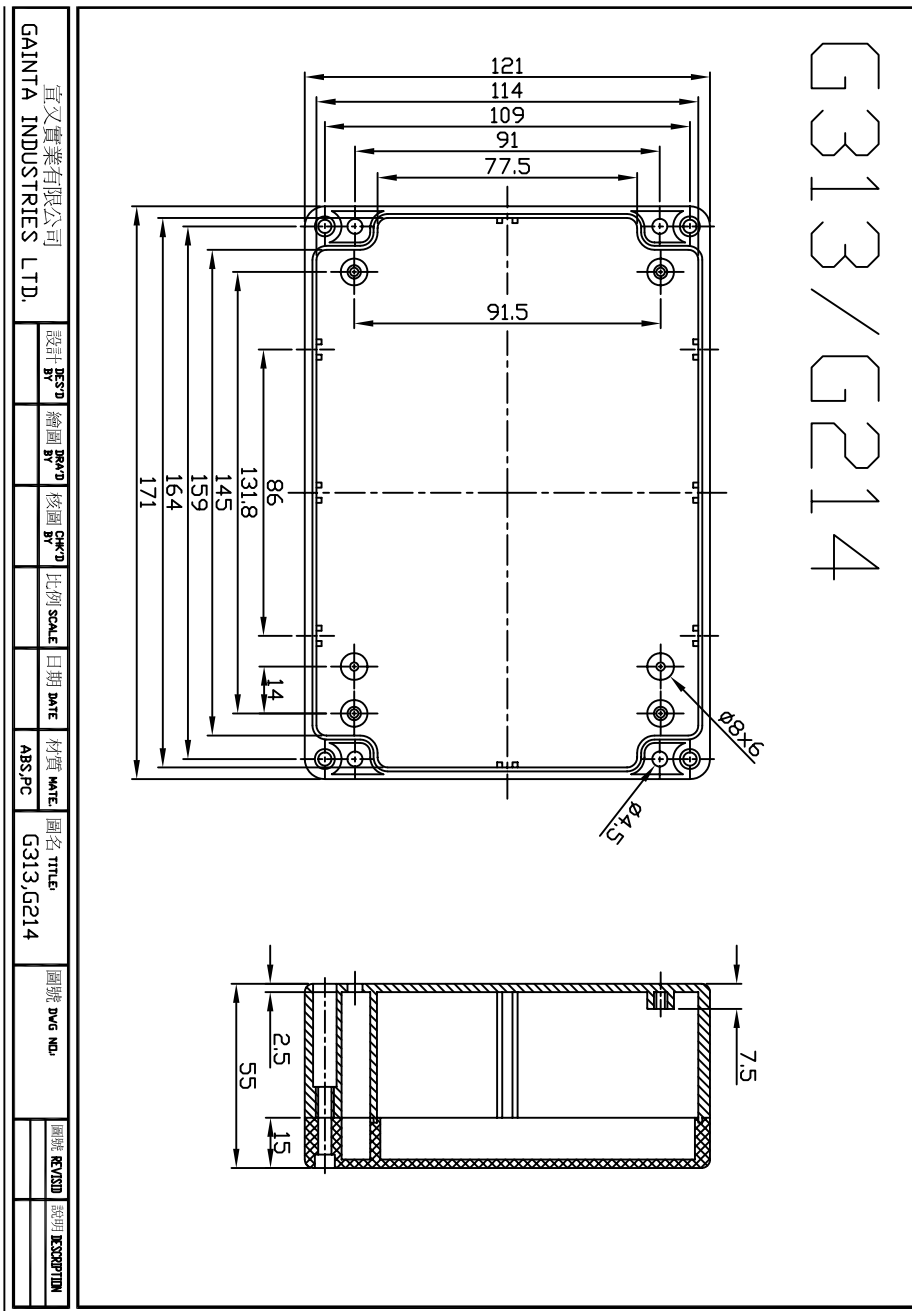

FOR PUBLIC RELEASE

- > The lid and base incorporate a tongue and groove sealing system with a neoprene gasket.
- > Wall mounting holes and lid fixing screws are outside the sealing area thus preventing the ingress of moisture and dust.
- > Designed to IP 65 of IEC 529 and nema 4 (dust and hoseproof).
- > Internal guide slots for mounting PCB assemblies vertically
- > Bosses on internal base allow fixing of PCB's horizontally or connection of terminals, etc into threaded brass inserts.
- > Lid fixing screw are M-4 stainless steel (non-magnetic) into threaded brass inserts.

Revised July 13, 2018 PJS