


# 7917 Series

## H.D. D-SUB Solder Cup Type

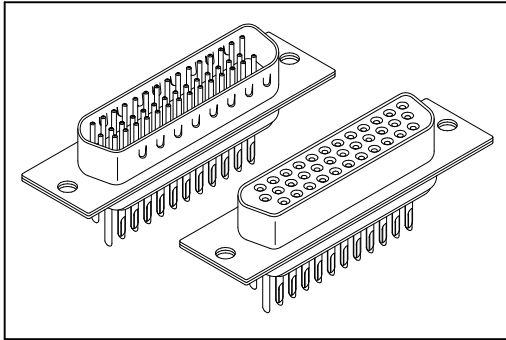

### Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

### Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.


Contact Resistance: 20mΩ max.

Operating Temperature: -55°C~+105°C.

### Features:

\* Additional plating options available.

Mates with: 7915, 7916.

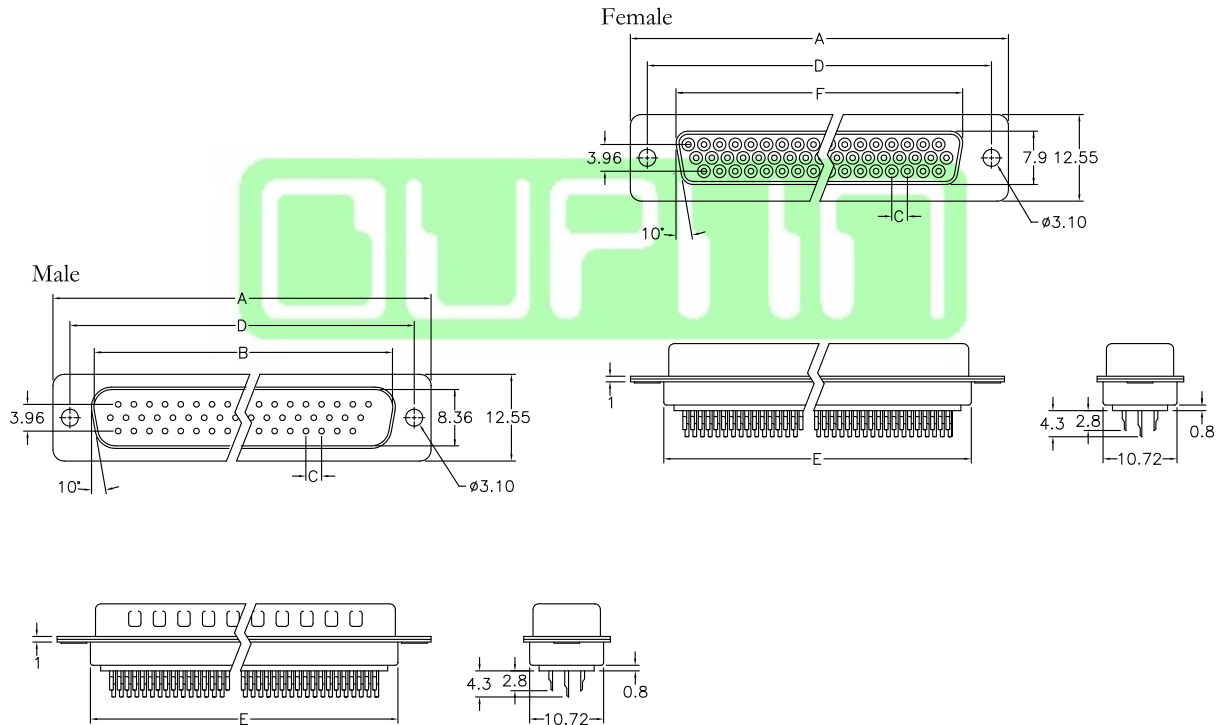

Position	Dimension					
	A	B	C	D	E	F
15	30.81	16.92	2.29	24.99	19.3	16.33
26	39.14	25.25	2.29	33.32	27.5	24.66
44	53.04	38.96	2.29	47.04	41.3	38.38
62	69.32	55.42	2.41	63.50	57.7	54.84

## Ordering information

7917-

Series

62

Position

M

M: Male  
F: Female

T

T: Tin Shell

B

B: Black  
U: Blue  
W: White

C

C: Selective Gold  
Plated

00

00: G/F

N1

Blank: Standard Type  
N1: See Page A167

A


A: Tray  
Package

# Mounting Option




## Option N1

With NUTS #4-40 Threaded  
Riveted On Face Side




## Option N1N6

With NUTS #4-40 Threaded  
Riveted On Face Side and  
Jack Screws Assembled




## Option N2

With NUTS #4-40 Threaded  
Riveted On Rear Side




## Option N2N6

With NUTS #4-40 Threaded  
Riveted On Rear Side and  
Jack Screws Assembled



## Option N3

With #4-40 Threaded Riveted  
Brackets (Board Locks)



## Option N3N6

With #4-40 Threaded Riveted  
Brackets and Jack Screws  
Assembled

