

Sealed Lead Acid (SLA) Batteries

12V 60AH - M6/F8 Terminal

Model: S 4567

Powerhouse
BATTERIES



This 12V 60Ah sealed lead acid (SLA) battery is a compact battery for powering 12V equipment. It is commonly used in battery back up systems, alarm and communications systems and UPS units. Fitted with M6 bolt and nut terminals, these batteries are easily user replaced in most equipment they are used in. Cells are fully sealed to prevent any leakage of electrolyte.





Our range of Powerhouse SLA batteries are from a quality supplier and are graded for use in UPS systems. We have found the quality of SLA batteries varies considerably between suppliers and often cheaper units have a shorter life span.

ActivFire Listed (afp3824). Conforms to IEC 60896-21:2004 and IEC 60896-22:2004.

Cell per unit	6	Ambient temperature	
Nominal Voltage (V)	12	Charge	0°C (32°F) to 40°C (104°F)
Nominal Capacity (Ah)	60Ah @ 20hour rate F.V(1.75/Cell)	Discharge	-15°C (5°F) to 50°C (122°F)
Weight	Approx 17.00kg(37.47Lbs.)	Storage	-15°C (5°F) to 40°C (104°F)
Internal Resistance (1KHz)	7.5mΩ	Max charge Current	
Max Discharge Current (5s)	660A (5s)	Cycle use :	Max charge current : 16.5A
Battery Life :	Stand by :3~5years		Charge voltage: 14.4V to 15.0V
Terminal Type	M6/F8	Stand by :	Charge voltage: 13.5V to 13.8V
Container Material	ABS(Option : 94-HB & 94V-0 flame retardant case)		



DIMENSIONS	Length	Width	Height	Total Height
Unit: mm	230±3	138±1	205±3	210 ±3
Unit: inch	9.06±0.12	5.43±0.04	8.07±0.12	8.94±0.12

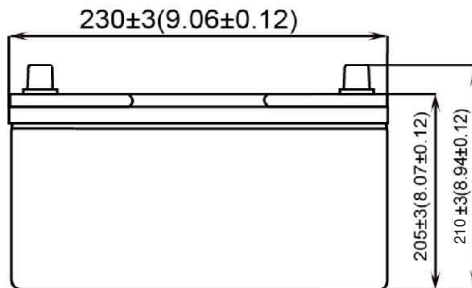

Constant current discharge characteristics Unit:A(25°C 77°F)										
F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	192.0	103.0	61.0	36.0	23.0	16.00	10.70	6.82	5.79	3.00
1.67V	173.0	94.3	56.3	32.4	20.0	15.30	9.98	6.75	5.73	2.98
1.70V	156.9	88.7	53.3	31.3	19.4	14.70	9.71	6.65	5.61	2.94
1.75V	142.5	83.1	51.3	30.4	18.7	14.30	9.46	6.56	5.56	2.89
1.80V	126.4	76.0	49.4	29.0	18.0	14.10	9.23	6.45	5.50	2.86
Constant power discharge characteristics Unit:W(25°C 77°F)										
F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	1900.0	1200.0	654.0	400.0	260.0	185.0	125.0	79.80	68.40	35.40
1.67V	1761.6	1006.8	619.8	367.2	228.6	176.4	115.8	79.20	67.80	35.28
1.70V	1620.0	954.0	592.2	358.2	223.8	170.4	113.4	78.00	66.60	34.86
1.75V	1513.2	906.0	572.4	348.0	215.4	165.6	110.4	77.40	66.00	34.20
1.80V	1371.6	840.0	556.2	334.2	208.8	163.2	108.0	76.20	65.40	33.96


Sealed Lead Acid (SLA) Batteries

12V 60AH - M6/F8 Terminal


Model: S 4567




Battery Discharge Characteristics (25°C/77°F)

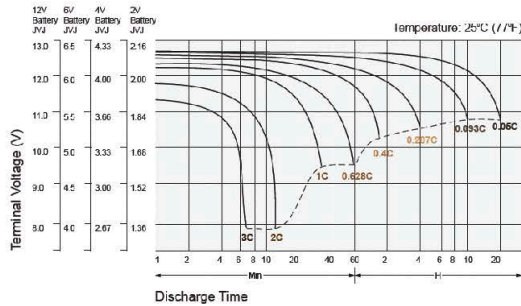


Battery Charge Characteristic for standby use

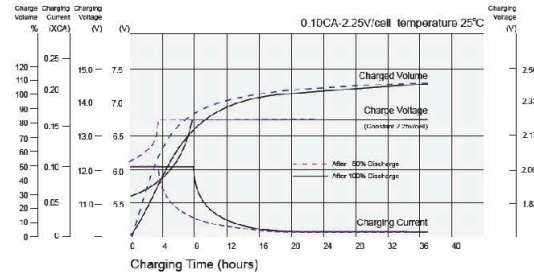


Temperature Effects in Relation to Battery Capacity

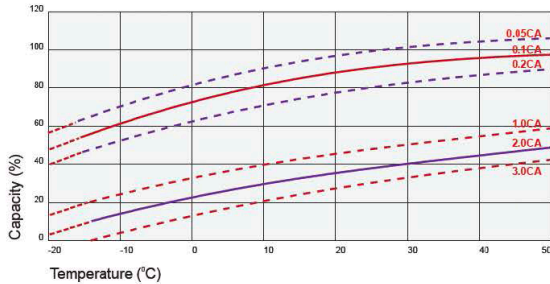


Temperature Effects on Long Term Float Life

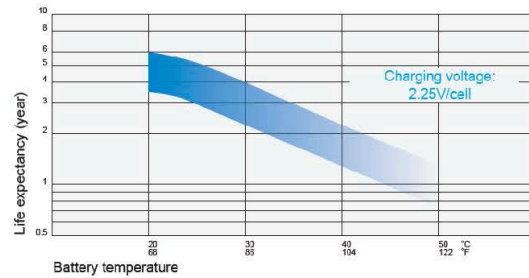

Cycle Service Life

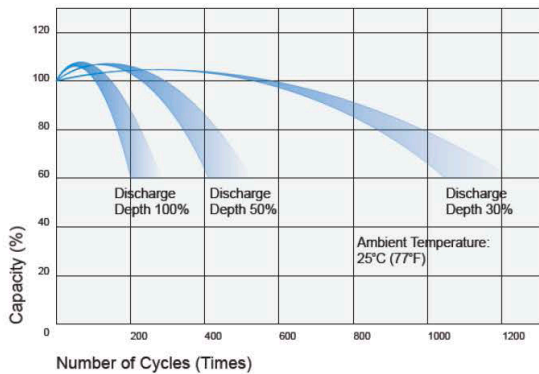

Self Discharge Characteristics

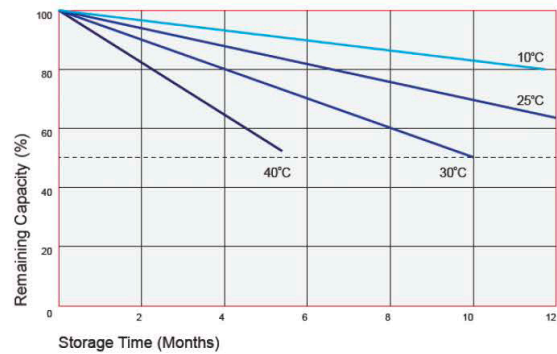

Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40-2.50	0.25C
Standby	25°C(77°F)	2.275	2.25-2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C >(A)	0.2C <(A)	0.5C <(A)	(A) >1.0C