

# Sealed Lead Acid (SLA) Batteries

## 12V 100AH - M8/F17 Terminal

### Model: S 4576

**Powerhouse**  
BATTERIES



This 12V 100Ah sealed lead acid (SLA) battery is a compact battery for powering 12V equipment. It is commonly used in battery back up systems, alarm and communications systems and UPS units. Fitted with M8 bolt and nut terminals, these batteries are easily user replaced in most equipment they are used in. Cells are fully sealed to prevent any leakage of electrolyte.





Our range of Powerhouse SLA batteries are from a quality supplier and are graded for use in UPS systems. We have found the quality of SLA batteries varies considerably between suppliers and often cheaper units have a shorter life span.

**ActivFire Listed (afp3824). Conforms to IEC 60896-21:2004 and IEC 60896-22:2004.**

<b>Cell per unit</b>	6	<b>Ambient temperature</b>	
<b>Nominal Voltage (V)</b>	12	Charge	0°C(32°F) to 40°C (104°F)
<b>Nominal Capacity (Ah)</b>	100Ah @ 20hr rate F.V(1.75/Cell)	Discharge	-15°C(5°F) to 50°C (122°F)
<b>Weight</b>	Approx 28.50kg	Storage	-15°C(5°F) to 40°C (104°F)
<b>Internal Resistance (1KHz)</b>	<5.5mΩ	<b>Max charge Current</b>	
<b>Max Discharge Current (5s)</b>	950A	<b>Cycle use :</b>	Max charge current : 27A
<b>Battery Life :</b>	Stand by : 3~5 years	Charge voltage:	14.4V to 15.0V
<b>Terminal Type</b>	M8/F17	<b>Stand by :</b>	Charge voltage: 13.5V to 13.8V
<b>Container Material</b>	ABS(Option : 94-HB & 94V-0 flame retardant case)		



DIMENSIONS	Length	Width	Height	Total Height
Unit: mm	330±3	173±2	215±3	220±3
Unit: inch	12.99±0.12	6.81±0.08	8.54±0.12	8.74±0.12

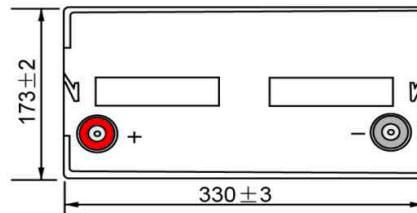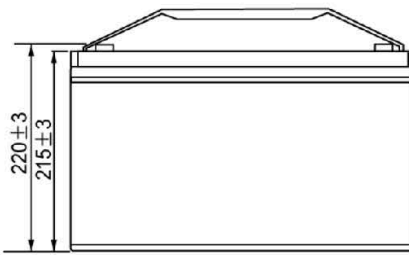

Constant current discharge characteristics Unit:A(25°C 77°F)										
F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	10HR	20HR
1.60V	283.0	233.0	183.0	116.6	61.8	37.1	28.0	17.7	9.64	5.06
1.67V	274.6	226.7	179.9	109.4	60.5	36.9	27.8	17.5	9.60	5.04
1.70V	268.1	222.0	166.2	107.0	59.3	36.6	27.6	17.2	9.56	5.05
1.75V	253.4	215.0	154.0	100.0	57.4	36.2	27.3	17.0	9.53	5.00
1.80V	232.1	208.0	147.4	98.2	56.3	35.8	27.0	16.5	9.50	4.99

Constant power discharge characteristics Unit:W/CELL(25°C 77°F)										
F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	10HR	20HR
1.60V	490.0	345.0	311.0	188.0	120.0	66.5	48.3	32.3	18.10	8.28
1.67V	492.0	332.0	303.0	175.0	118.0	65.1	48.2	31.9	17.70	8.13
1.70V	484.0	323.0	291.6	168.0	114.0	62.8	46.8	31.5	17.40	7.99
1.75V	456.0	315.0	261.0	162.0	106.0	60.8	45.8	30.7	17.10	7.84
1.80V	417.0	302.0	257.0	161.0	101.0	60.1	45.2	30.3	16.70	7.66


# Sealed Lead Acid (SLA) Batteries

## 12V 100AH - M8/F17 Terminal


### Model: S 4576




#### Battery Discharge Characteristics (25°C/77°F)

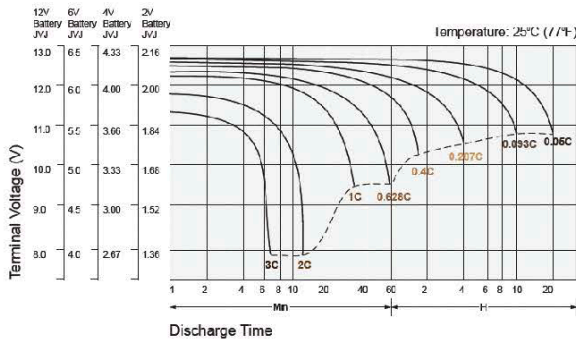


#### Battery Charge Characteristic for standby use

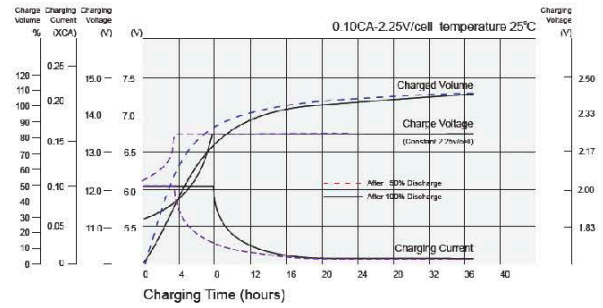


#### Temperature Effects in Relation to Battery Capacity

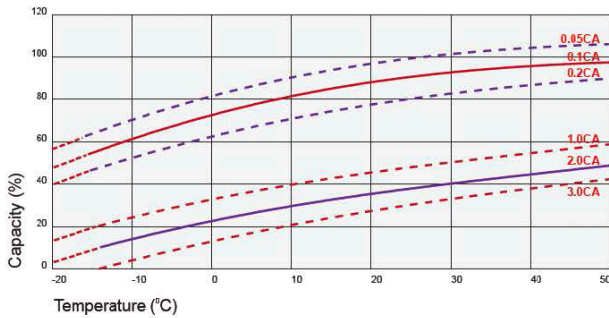


#### Temperature Effects on Long Term Float Life

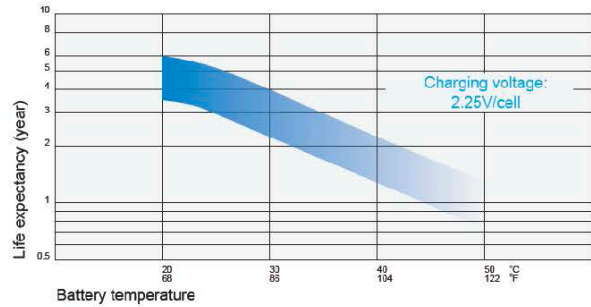

#### Cycle Service Life

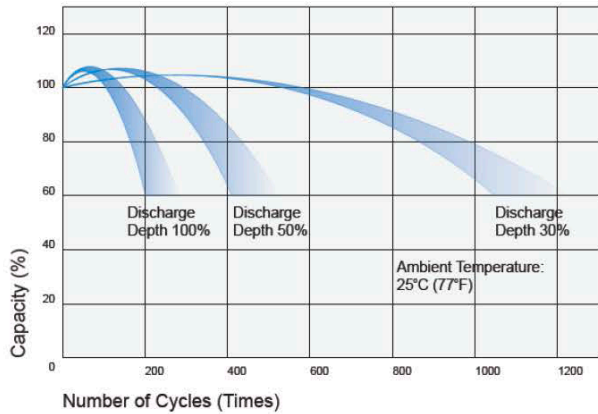

#### Self Discharge Characteristics

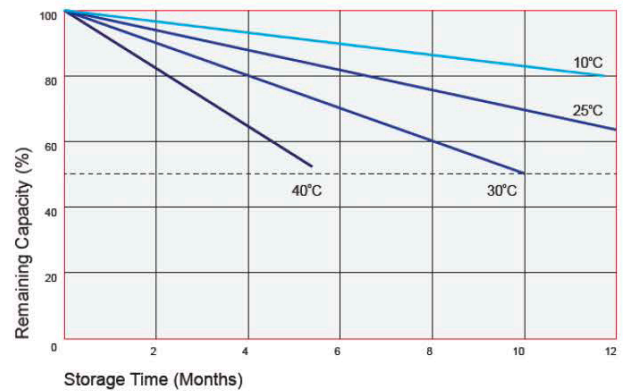

#### Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40-2.50	0.25C
Standby	25°C(77°F)	2.275	2.25-2.30	

#### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C > (A)	0.2C < (A)	0.5C < (A)	(A) > 1.0C