

LiFePO4 Lithium Iron Phosphate Batteries

12V12AH

Model:SL4547A



The latest generation in maintenance free batteries is here! LiFePO4 batteries offer longer service life than traditional lead acid batteries, plus weigh less than HALF as much as SLA batteries. LiFePO4 also provide more usable life per cycle, allowing for longer run times by holding a higher voltage until capacity is almost exhausted. These batteries will also maintain 80-90% charge when in storage - far higher than their lead acid counterparts.

Each battery is fitted with an internal battery management system to provide safe charging and discharging at all times. This system provides internal short circuit, over temperature and under/over voltage cut off. Can be wired in series and/or parallel.



Applications



BATTERY SPECIFICATIONS

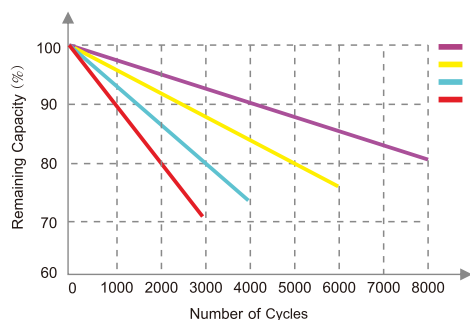
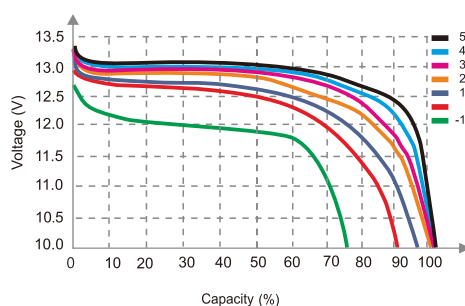
Battery Type - Chemistry	LiFePO ₄	Internal Resistance - Milliohms	< 30mΩ
Nominal Voltage	12.8 V	Efficiency - round trip	> 99.5%
Amp Hour Capacity	12 AH	Self Discharge per Month	< 3%
Energy Density	153.6 Wh	Max 4 - series connections	12-48V
Dimensions (L*W*H)	151*98*101 mm	Parallel connections	No Limited
Weight	1.3 KG	Case IP Rating	IP65
Terminal Type	F2	Design Life	20 Years
Terminal Torque	— NM	Cycle Life (1C, 25°C@80%DOD)	>4000 cycles
Case Material	ABS	Cycle Life (0.2C, 25°C@80%DOD)	>6000 cycles
BMS build-in	Yes	Discharge Temperature	(-23 to 65)°C
Recommend Charge Voltage	14.2 ± 0.20V	Charge Temperature	(-3 to 65)°C
Max Charge Voltage	14.8 ± 0.20V	Storage Temperature	(-20 to 45)°C
Recommend Charge current	2.4 A	Bluetooth(APP)	Optional
Max Charge Current	12 A	LCD Screen	Optional
Charge Current (0 to -10°C)	<0.1C	Heating functions -20°C	Optional By Charger
Charge Current (-20 to -10°C)	<0.05C	Batteryself heating function	Optional By Cell
Recommend Discharging voltage	10.8 ± 0.20V	Shipping Classification	UN3480, CLASS9
Max Discharging Voltage	8.8 ± 0.20V	Other Certifications	CB /CE
Max Discharge Current	12 A		
Pulse Discharge Current	30A/3S		

LiFePO4 Lithium Iron Phosphate Batteries**12V12AH****Model:SL4547A****BMS SPECIFICATIONS**

BMS Version: JBD

BMS Protections Range: Over (Voltage, Current, Temperature management) and cell balance

Over Charging Cell protection	$>3.75\pm0.03V$	Delay	500ms-1500ms
Over Charging Pack protection	$>15.0\pm0.12V$	Delay	500ms-1500ms
Over Charging Current 1	$30\pm10A$	Delay	500ms-1500ms
Over Charging Current 2	--	Delay	500ms-1500ms
Over Charging Temp Protection 1	--		
Over Discharging Cell protection	$<2.2\pm0.08V$	Delay	500ms-1500ms
Over Discharging Pack protection	$<8.8\pm0.32V$	Delay	500ms-1500ms
Over Discharging current 1	$41\pm10A$	Delay	500ms-1500ms
Over Discharging current 2	$100\pm25A$	Delay	50ms-150ms
Over Discharging Temp Protection 1	--		
PCB Temp protection	--		
Cell Balance Start	$3.50\pm0.05V$		
Cell Balance Current	$45\pm10mA$		
Short circuit	$220\pm50A$	Delay	200-800us

Different DOD Discharge Cycle Life Curve 1C 25°C**Different Temperature Discharge Curve(0.2C)****State of Charge Curve(0.5C, 25°C)**