


Telecommunications 600Ω / 600Ω Isolation

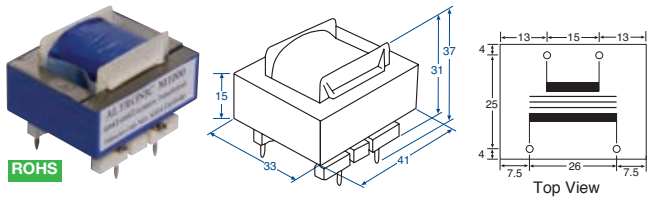


Impedance: 600Ω line, 600Ω equip  
 Turns ratio: 1:1  
 Max level: +15dBm @ 300Hz  
 Insertion loss: 1dB max @ 0dBm  
 Frequency response: 300Hz - 10kHz  
 Return loss: >15dB, 300Hz - 5kHz


Max unbalanced DC: 60mA  
 Proof test: 3.5kV RMS  
 Dimension: 41L x 31H x 33W  
 Weight: 153 gms  
 PCB hole size: 1.5mm

Price Each	RRP	4+	10+
<b>M 1000</b>	<b>13.95</b>	<b>12.75</b>	<b>11.70</b>

Audio Bridging Input Transformers

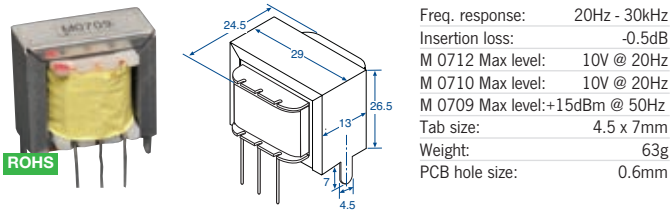


Freq. response: 20Hz - 30kHz  
 Insertion loss: -0.5dB  
 M 0712 Max level: 10V @ 20Hz  
 M 0710 Max level: 10V @ 20Hz  
 M 0709 Max level: +15dBm @ 50Hz  
 Tab size: 4.5 x 7mm  
 Weight: 63g  
 PCB hole size: 0.6mm

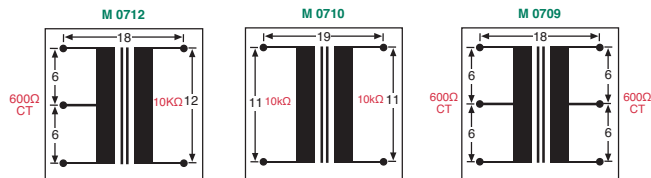

Price Each	RRP	4+	10+
<b>M 0712</b> 600Ω/10kΩ	<b>9.95</b>	<b>8.95</b>	<b>7.60</b>
<b>M 0710</b> 10kΩ/10kΩ	<b>9.95</b>	<b>8.95</b>	<b>7.60</b>
<b>M 0709</b> 600Ω/600Ω	<b>9.95</b>	<b>8.95</b>	<b>7.60</b>

Audio Coupling Trans 3kΩ / 3kΩ

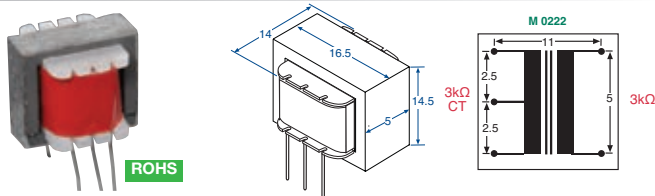


Impedance: 3kΩ CT / 3kΩ  
 Freq. response: 300Hz-3kHz ±2.5dB  
 Rated power: 450mW  
 Primary DC resistance: 220Ω ±10%

Secondary DC resistance: 270Ω ±10%  
 Fly lead length: 7mm  
 PCB hole size: 0.5mm

Price Each	RRP	4+	10+
<b>M 0222</b>	<b>4.95</b>	<b>3.85</b>	<b>3.75</b>

Audio Coupling Trans 1kΩ / 8Ω

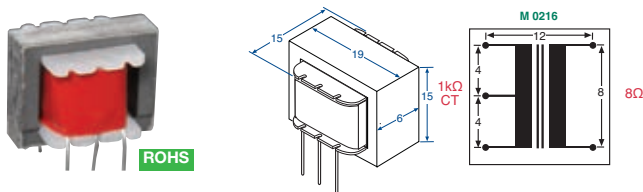


Impedance: 1kΩ CT / 8Ω  
 Freq. response: 300Hz-3kHz ±2.5dB  
 Rated power: 450mW  
 Primary DC resistance: 100Ω ±10%

Secondary DC resistance: 0.7Ω ±10%  
 Fly lead length: 10mm  
 PCB hole size: 0.5mm

Price Each	RRP	4+	10+
<b>M 0216</b>	<b>4.95</b>	<b>3.85</b>	<b>3.75</b>

Audio Coupling Trans 500Ω / 8Ω

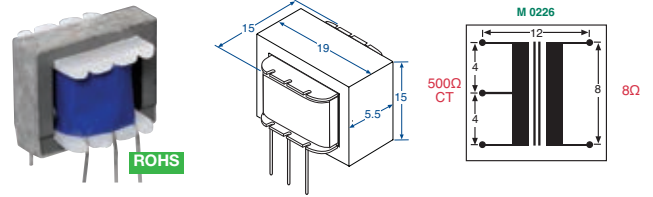


Impedance: 500Ω CT / 8Ω  
 Freq. response: 300Hz-3kHz ±2.5dB  
 Rated power: 450mW  
 Primary DC resistance: 54Ω ±10%

Secondary DC resistance: 0.8Ω ±10%  
 Fly lead length: 10mm  
 PCB hole size: 0.5mm

Price Each	RRP	4+	10+
<b>M 0226</b>	<b>5.95</b>	<b>4.75</b>	<b>4.25</b>

Telecommunications 600Ω / 600Ω Isolation

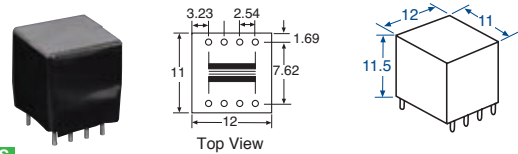


Impedance: 600Ω line, 600Ω equip.  
 Turns ratio: 1:1  
 Max level: +5dBm @ 200Hz  
 Insertion loss: 1.4dB max @ 1kHz  
 Return loss: >16dB @ 300Hz - 3.5kHz

Proof test: 3.0kV AC 1 minute  
 Dimension: 12L x 11H x 11W  
 Weight: 5 gms  
 PCB hole size: 0.7mm

Price Each	RRP	4+	10+
<b>M 1020</b>	<b>18.50</b>	<b>16.65</b>	<b>14.80</b>

Telecommunications 600Ω / 600Ω Isolation

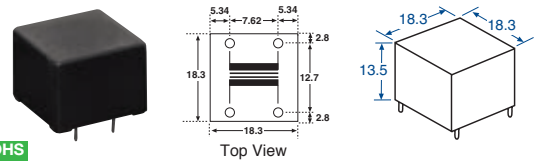


Physical dimensions compatible with ETAL P1200 model.

Impedance: 600Ω line matching  
 Turns ratio: 1:1  
 Max level: +10dBm @ 200Hz  
 Insertion loss: 4.7dB max @ 2kHz

Return loss: >15dB @ 200Hz - 4kHz  
 Proof test: 5.5kV RMS  
 Max unbalanced DC: 100µA  
 Dimension: 18L x 13H x 18W  
 Weight: 13 gms  
 PCB hole size: 0.7mm


Price Each	RRP	4+	10+
<b>M 1015</b>	<b>18.50</b>	<b>16.65</b>	<b>14.80</b>

Shielded MuMetal Coupling Transformers



Used for coupling audio circuits. These transformers help prevent earth loops which may generate hum. Essential coupling device where DC isolating is required. Housed in a mumetal can to guard against stray hum fields.

Freq. response: 30Hz - 20kHz  
 Insertion loss: 1dB  
 Max level: -10dBm @ 30Hz (M 0706 2V @ 30Hz)  
 Lead length: ≈75mm  
 Mounting holes: M3 tapped  
 Weight: 26g

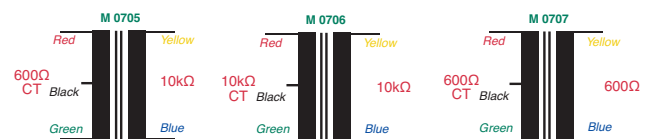

Price Each	RRP	4+	10+
<b>M 0705</b> 600Ω/10kΩ	<b>22.50</b>	<b>20.25</b>	<b>18.00</b>
<b>M 0706</b> 10kΩ/10kΩ	<b>22.50</b>	<b>20.25</b>	<b>18.00</b>
<b>M 0707</b> 600Ω/600Ω	<b>22.50</b>	<b>20.25</b>	<b>18.00</b>