


▼ Anderson Connectors

Anderson® High Current DC Connectors

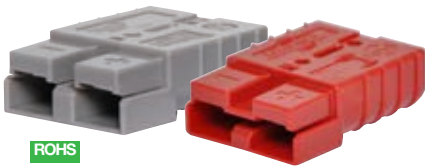

ROHS

Genuine Anderson® connectors, these heavy duty DC plugs feature a reversible gender design (same plug is both male and female). Not suitable for connecting or disconnecting under load.

P 7835A/36A: 6 AWG, max insulation Ø11.2mm.

P 7840A: 2 AWG, max insulation Ø14.6mm.

P 7845A: 1 AWG, max insulation Ø18.4mm.

Price Each	RRP	4+	10+
P 7835A 50A Grey	9.95	8.75	7.75
P 7836A 50A Red new	9.95	8.75	7.75
P 7840A 120A Grey	18.50	16.65	14.80
P 7845A 175A Grey	27.95	25.50	22.50

Anderson® Modular DC Connectors

ROHS



Create your own multipole connectors

Genuine Anderson type. High current DC connectors as used in automotive and industrial applications. Reversible gender design (same plug is both male and female). Can be dovetailed together for multi-pole connectors. Sold individually.

P 7805A/6A : 12-16 AWG, max insulation Ø4.45mm.

P 7817A/18A: 6 AWG, max insulation Ø11mm.

Price Each	RRP	10+	25+
P 7805A 30A Red	2.25	1.95	1.80
P 7806A 30A Black	2.25	1.95	1.80
P 7817A 75A Red	7.20	6.85	6.40
P 7818A 75A Black	7.20	6.85	6.40

Accessories For Anderson® Connectors



P 7842A

P 7847

Protective caps

new
Crimp lugs

Handles are recommended for easy disconnection or unplugging when required. Protective caps help to minimise terminal corrosion when disconnected.

Price Each	RRP	4+	10+
Separation handle			
P 7842A Handle for P 7835/40A	8.95	7.90	6.70
P 7847 Handle for P 7845A	11.95	10.95	9.95
Protective caps			
P 7850A Cap for P 7835A	8.95	7.95	6.95
P 7851 Cap for P 7840A	9.95	8.75	7.75
P 7852 Cap for P 7845A	10.95	9.75	8.75
Crimp lugs new			
P 7857 Lug to suit 30A	0.95	0.90	0.80
P 7858 Lug to suit 50A/75A	1.95	1.80	1.65
P 7859 Lug to suit 120A	5.95	5.55	5.10
P 7860 Lug to suit 175A	6.80	6.35	5.85

▼ DC Battery Connectors

'Deans' Style High Current Connector



ROHS

Ideal for use as battery connectors in high current draw applications such as RC LiPo batteries. Supplied as plug & socket pair. 60A rated @ 600V DC.

Price Each	RRP	4+	10+
P 7828 D100 'T' Type	3.95	3.40	3.10

XT Style High Current Connector



ROHS

Ideal for use as battery connectors in high current draw applications such as RC LiPo batteries. Supplied as plug & socket pair. All ratings @ 600V DC.

Price Each	RRP	4+	10+
P 7822 XT30 30A new	4.50	4.05	3.60
P 7824 XT60 60A	4.95	4.50	4.00
P 7825 XT90 90A	8.95	7.95	7.25

EC5 5mm Bullet Connector



ROHS

Secure fit interlocking 5mm dual banana plug pair with solder cup connection. Ideal for RC LiPo batteries. 60A rated @ 600V DC.

Price Each	RRP	4+	10+
P 7823	5.95	4.95	4.45

JST Style 2 Way Crimp Connectors



P 7830

ROHS

Widely used in RC hobbies. Includes terminal crimps.

Price Each	RRP	2+	20+
P 7830 2 Pin Plug	1.75	1.20	0.95
P 7831 2 Pin Socket	1.75	1.20	0.95

In-line 2 Pin Bullet Connector



Supplied pre-terminated in a 30cm loop with mating connectors on each end. 18AWG cable (≈7.5A rated).

Price Each	RRP	10+	40+
M 8610	3.75	3.35	3.05

Multi-Purpose Pluggable DC Connectors




H 2320

Plug and socket are inline. Prices include plug, socket and bullet crimp/solder pins.

Price Each	RRP	10+	50+
H 2319 2 pole 15A	4.75	4.60	4.40
H 2320 3 pole 14A	5.30	4.95	4.75
H 2321 4 pole 13A	5.90	5.50	5.25
H 2322 6 pole 12A	7.35	6.95	6.50
H 2325 9 pole 10A	11.15	10.25	9.50

Multi-Purpose Pluggable DC Connectors

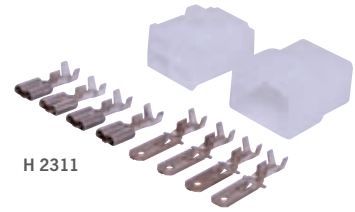

H 2311

Plug and socket are inline. Prices include plug, socket & crimp/solder pins.

Price Each	RRP	10+	50+
H 2309 2 pole 15A	3.95	3.80	3.70
H 2310 3 pole 15A	4.75	4.55	4.40
H 2311 4 pole 15A	4.95	4.70	4.50
H 2312 6 pole 15A	5.80	5.55	5.30

Deutsch® Multipole DC Connectors

ROHS



P 7886 6 pole

World famous weatherproof pluggable connectors for automotive and industrial wiring. Supplied in a set including crimp pins, gasket, male and female connector bodies. 13A rated. Accepts 20-14 AWG wire. -55 to +125°C. See T 1532 for suitable crimp tool.

P 7880: two pairs of male and female pins.

Note: We recommend using a small amount of petroleum jelly on sealing gasket for best performance.

Price Each	RRP	4+	10+
P 7882 2 pole 13A	7.95	7.50	6.95
P 7883 3 pole 13A	10.95	10.00	9.35
P 7884 4 pole 13A	13.95	13.20	12.25
P 7886 6 pole 13A	18.95	17.60	16.15
P 7880 Spare crimp pins pk2	5.95		

▼ MC-4 Solar Connectors

IP67 MC4 Solar Panel Connectors



P 8600B

Water & dust proof - IP67 rated. Commonly used on photovoltaic solar panel arrays. Fully sealed design for use in exposed installations. Rated 30A @ 1000V DC (70°C). Cable entry 6.5mm. Suits 4mm² solar cable, see W 7015. Ratchet crimper to suit T 1535A.

Price Each	RRP	4+	10+
P 8600B Plug and socket	7.95	7.45	6.80

MC-4 IP67 "Y" Adaptor Set



new
for 2019

Pair of adaptors for splitting single MC-4 lines into dual. Rated 30A @ 1000V.

Price Each	RRP	4+	10+
P 8611 Adaptor set	24.50	23.00	21.80