

▼ Data Cable

Flat Modular Telephone Cable

ACMA approved.




W 2312:	≈2.2 x 5.0mm	Conductor area / gauge:	
W 2313/9:	≈2.2 x 7.0mm	0.12mm ² / 26AWG	
W 2314:	≈2.2 x 9.0mm	Size:	7/0.15

Price Per	RRP (m)	Roll	2 Rolls
W 2312 4 Core 100m	0.75	60.00	50.00
W 2313 6 Core 100m	0.95	75.00	65.00
W 2319 6 Core 300m	0.95	195.00	165.00
W 2314 8 Core 100m	1.20	95.00	80.00

Shielded Twin Pair Audio / Data

Each pair individually shielded with aluminium mylar shield plus single drain wire.

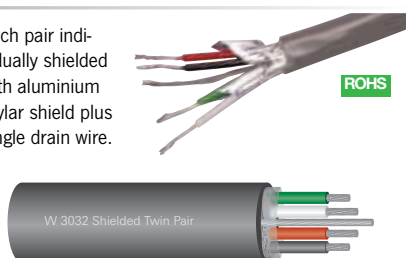

Conductor size:	7/0.20
Strand diameter:	0.20mm
Outside diameter:	≈4.6mm
Conductor area:	0.22mm ² (24AWG)
Temperature rating:	60°C

Price Per	RRP (m)	Roll	2 Rolls
W 3032 100m Roll	1.60	115.00	105.00
W 3033 300m Roll	1.60	345.00	300.00

Stranded Rainbow Cable


1.27mm Pitch.
Conductors 7 x
0.127mm 28AWG.



Price Per	RRP (m)	Roll	4 Rolls
W 2510 10 Way 30m	2.45	64.50	58.50
W 2516 16 Way 30m	3.60	97.50	87.00
W 2524 24 Way 30m	5.85	159.00	145.50

Stranded IDC Cable

1.27mm pitch.
Conductors 7/0.127mm
28AWG.



Price Per	RRP (m)	Roll	4 Rolls
W 2610 10 Way 30m	1.15	31.50	27.00
W 2614 14 Way 30m	1.45	39.00	34.50
W 2616 16 Way 30m	2.00	54.00	48.00
W 2620 20 Way 30m	2.10	57.00	51.00
W 2625 25 Way 30m	2.75	73.50	66.00
W 2626 26 Way 30m	2.80	75.00	67.50
W 2634 34 Way 30m	3.80	103.50	93.00
W 2640 40 Way 30m	4.50	120.00	108.00
W 2650 50 Way 30m	6.25	171.00	154.50

▼ Single Core Wire

Tinned & Enamelled Copper Wire

Enamelled copper wire ideal for crossovers networks, custom chokes and inductors.
Tinned copper wire ideal for PCB links, breadboards etc.



Enamelled Copper Wire

Price Per Roll	Diam	AWG	Length	RRP	4+	10+
25gm Rolls						
W 0403	0.25	30	60m	6.95	6.25	5.50
W 0404	0.4	26	20m	6.95	6.25	5.50
100gm Rolls						
W 0405	0.5	24	60m	11.95	11.50	10.95
W 0406	0.63	22	35m	11.95	11.25	10.85
W 0407	0.8	20	20m	12.95	12.25	11.85
W 0408	1.0	18	15m	11.95	11.25	10.85
W 0409	1.25	16	10m	11.95	11.25	10.85

Tinned Copper Wire

Price Per Roll	Diam	AWG	Length	RRP	4+	10+
W 0420	0.71	22	30m	29.95	26.90	23.70
WR0420	0.71	22	100m	34.95	31.50	27.95

Nichrome Resistance Wire

As used in heating elements, vapes etc.
80% nickel, 20% chromium.
28AWG.
≈9.1m per roll.



Price Per Roll	RRP	3+	6+
W 0435	8.50	7.65	6.80

▼ Heatshrink

Heatshrink With Glue Backing

Ideal for minimising cable movement and reducing moisture ingress into cable joints and plugs. 2:1 shrink ratio.




Price Per 1.2m Length	RRP	4+	10+
Black			
W 0922A	3	1.5	4.50 4.05 3.60
W 0933A	5	2.5	4.95 4.50 4.00
W 0944A	6	3	5.50 4.95 4.40
W 0955A	10	5	6.50 5.85 5.20
W 0966A	13	6.5	7.45 6.50 5.75
W 0977A	19	9.5	9.95 8.95 7.95
Red new			
W 1000	3	1.5	4.50 4.05 3.60
W 1001	5	2.5	4.95 4.50 4.00
W 1002	6	3	5.50 4.95 4.40
W 1003	10	5	6.50 5.85 5.20
W 1004	13	6.5	7.45 6.50 5.75
W 1005	19	9.5	9.95 8.95 7.95

Important Note For Wholesale Customers

All prices listed in this catalogue are RRP "retail" prices. To access our competitive wholesale pricing scheme apply for an account via www.altronics.com.au or phone the wholesale division in your state - see back cover for phone numbers..

Heatshrink Tubing (1.2m lengths)



Suitable for insulation, colour coding, strain relief and protection in electrical and electronic applications.

Temperature rating: -55°C to 135°C
Shrink ratio: 2:1
Meets stringent requirements of MIL-23053/5 Class 1.

Price Per 1.2m Length	RRP	4+	10+
Black ●			
W 0910A	1.5	0.75	1.25 1.10 1.00
W 0911A	2.4	1.2	1.35 1.20 1.10
W 0912A	3	1.5	1.50 1.30 1.20
W 0913A	5	2.5	2.00 1.85 1.70
W 0914A	6	3	2.20 2.05 1.90
W 0915A	10	5	2.90 2.70 2.50
W 0916A	13	6.5	3.70 3.50 3.30
W 0917A	20	10	5.50 4.90 4.50
W 0919A	30	15	14.50 13.50 12.50
W 0901A	50	25	16.50 14.85 13.20
Red ●			
W 0920A	1.5	0.75	1.25 1.10 1.00
W 0921A	2.4	1.2	1.35 1.20 1.10
W 0922A	3	1.5	1.50 1.30 1.20
W 0923A	5	2.5	2.00 1.85 1.70
W 0924A	6	3	2.20 2.05 1.90
W 0925A	10	5	2.90 2.70 2.50
W 0926A	13	6.5	3.70 3.50 3.30
W 0927A	20	10	5.50 4.90 4.50
W 0929A	30	15	14.50 13.50 12.50
Blue ●			
W 0930A	1.5	0.75	1.25 1.10 1.00
W 0932A	3	1.5	1.50 1.30 1.20
W 0933A	5	2.5	2.00 1.85 1.70
W 0934A	6	3	2.20 2.05 1.90
W 0935A	10	5	2.90 2.70 2.50
W 0936A	13	6.5	3.70 3.50 3.30
W 0937A	20	10	5.50 4.90 4.50
W 0939A	30	15	14.50 13.50 12.50
White ○			
W 0940A	1.5	0.75	1.25 1.10 1.00
W 0942A	3	1.5	1.50 1.30 1.20
W 0943A	5	2.5	2.00 1.85 1.70
W 0944A	6	3	2.20 2.05 1.90
W 0945A	10	5	2.90 2.70 2.50
W 0946A	13	6.5	3.70 3.50 3.30
W 0947A	20	10	5.50 4.90 4.50
W 0949A	30	15	14.50 13.50 12.50
Clear			
W 0950A	1.5	0.75	1.25 1.10 1.00
W 0952A	3	1.5	1.50 1.30 1.20
W 0953A	5	2.5	2.00 1.85 1.70
W 0954A	6	3	2.20 2.05 1.90
W 0955A	10	5	2.90 2.70 2.50
W 0956A	13	6.5	3.70 3.50 3.30
W 0957A	20	10	5.50 4.90 4.50
W 0959A	30	15	14.50 13.50 12.50
Green ●			
W 0960A	1.5	0.75	1.25 1.10 1.00
W 0962A	3	1.5	1.50 1.30 1.20
W 0963A	5	2.5	2.00 1.85 1.70
W 0964A	6	3	2.20 2.05 1.90
W 0965A	10	5	2.90 2.70 2.50
W 0966A	13	6.5	3.70 3.50 3.30
W 0967A	20	10	5.50 4.90 4.50
W 0969A	30	15	14.50 13.50 12.50
Yellow ●			
W 0970A	1.5	0.75	1.25 1.10 1.00
W 0972A	3	1.5	1.50 1.30 1.20
W 0973A	5	2.5	2.00 1.85 1.70
W 0974A	6	3	2.20 2.05 1.90
W 0975A	10	5	2.90 2.70 2.50
W 0976A	13	6.5	3.70 3.50 3.30
W 0977A	20	10	5.50 4.90 4.50
W 0979A	30	15	14.50 13.50 12.50