

A 3217B HDMI and Infrared Extender Balun

Over single 50m UTP Cables with IR Control

Operation Manual

I. Introduction

The HDMI extender over one UTP cable of up to 50m length with IR control is the best way to send your HDMI signal over long distances. Instead of using expensive HDMI cables, this device lets you use your existing Cat5e/ 6 cables/sockets while retaining the same performance characteristics like transferring HDMI video and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio, all with a bandwidth up to 165MHz. You can also use your existing remote to control your device through an enclosed IR blaster.

II. Features

1. Compliant with HDMI 1.3, HDCP 1.1 and DVI1.0 standards. Supports HDMI 1.4 with 3D, ARC function.
2. Supports digital video formats in 1080p and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) Digital audio over UTP Cable of up to 50m length.

3. Equalizes and recovers incoming TMDS data before re-transmitting it at high quality, regardless of the incoming signal quality.
4. Super IR control system, IR transport channel can be forward or backward.
5. Support HDMI loop out.

III. Package Contents

- HDMI Transmitter
- HDMI Receiver
- 5 Vd.c. 1A power adaptor 2pcs
- Operation Manual
- Wideband IR Tx 2pcs
- Wideband IR Rx 2pcs

IV. Specifications

Transmitter Ports	2 × HDMI (Female type), 1x Cat5e/6, 2x3.5mm phone
Receiver Ports	1x HDMI (Female type), 1xRCA, 1x Cat5e/6, 2x3.5mm phone
Support Resolution	480i ~1080p50/60, VGA~UXGA
ESD Protection	Human Body model: ±8 kV (air-gap discharge)
	±4 kV (contact discharge)
Power Supply	5 Vd.c. 1A
Dimensions	65 mm (W) × 118mm (D) × 26mm (H)
Weight	410 g (TX+RX)
Chassis Material	Metal

Silkscreen Color	Black
Operating Temperature	0 °C~40 °C/ 32 °F~104 °F
Storage Temperature	-20 °C ~ 60 °C/-4 °F ~140 °F
Relative Humidity	20~90 % RH (non-condensing)
Power Consumption	3.2W (Transmitter)
	2.2 w (Receiver)

V. Connect and Operate

1. Connect the signal source such as Blu-Ray Player, Play Station 3, audio/video receiver, or satellite receivers and computers equipped with HDMI output interfaces, with a short high-speed HDMI cable to the HDMI Transmitter input. HDMI cable length should not exceed 5 metres.
2. Connect the HDMI Transmitter output RJ-45 ports using single Cat 5e or Cat 6 UTP cable to included Receiver. It is strongly recommended that factory terminated cable assemblies be

used, and their length shall not exceed 50 metres respectively for the extenders.

3. Connect the HDMI output from the Receiver to high-definition display devices such as HD-LCD, HD-DLP and HD projectors with HDMI input interfaces. Use high-speed HDMI cables that are recommended for the distances that are required for each connection. HDMI cable length should not exceed 5 metres.
4. The source can be controlled from the display. This is accomplished by using an optional IR Receiver pigtail pointing away from the display, which can be connected to the receiver portion of the extender. The IR Transmitter pigtail is then connected to the Transmitter of the extender and pointed at the source.

VI. EDID control Table


The Splitter has 16 positions to select EDID on rear panel. Refer to the appendix EDID description.




Position	EDID Description
0	1080p, 2CH AUDIO
1	1080p, DOLBY/DTS 5.1
2	1080p, HD AUDIO
3	1080i, 2CH AUDIO

4	1080i, DOLBY/DTS 5.1
5	1080i, HD AUDIO
6	3D,1080p, 2CH AUDIO
7	3D, 1080p,DOLBY/DTS 5.1
8	3D,1080p, HD AUDIO
9	Copy EDID from the Transmitter HDMI loop out
A	Copy EDID from the Receiver HDMI out
B	1080p, 2CH AUDIO
C	1080p, 2CH AUDIO
D	1080p, 2CH AUDIO
E	1080p, 2CH AUDIO
F	1080p, 2CH AUDIO

VII. Connection Diagram

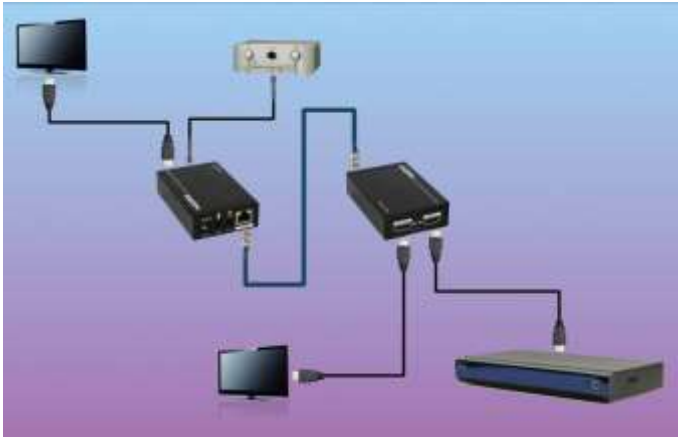

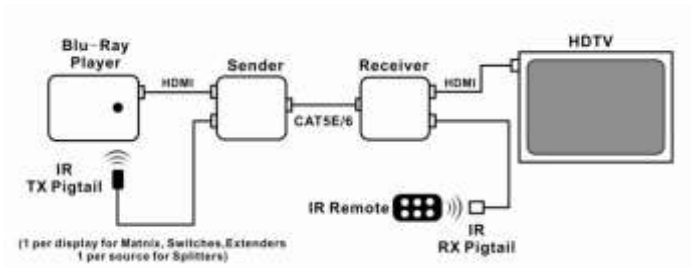

NOT FIELD SERVICEABLE.

Distributed by: Altronic Distributors Pty. Ltd. Perth. Western Australia.

Phone: 1300 780 999 Fax: 1300 790 999

Internet: www.altronics.com.au