



Redback® A 4954 (Front)



Redback® A 4954 (Rear)

Operating Manual

A 4954 5 Pin XLR - Cat5 Extender (Receiver)

OVERVIEW:

The Redback® A 4954 receives audio from compatible Redback® Cat5e/6 transmitters and converts the signal to a balanced XLR output with PTT connection. The output level is DIP switch selectable, and the output volume is screwdriver adjusted via the trimpot on the front of the unit.

The unit is powered from 24V DC, which can be connected to the DC socket on the rear of the unit, or it can be supplied through the Cat5/6 cabling from other compatible Redback® products. A 24V DC plugpack is supplied for connection to the DC socket.

The Redback® A 4954 can be connected to compatible Redback® products such as the A 4952 and A 4953. These units carry the balanced output and push-to-talk (PTT) signal to the A 4954 ensuring seamless operation for paging microphones (PTT connects to pins 4 and 5 of the XLR socket).

DIP Switch Settings

Switch 1 - Sets the output as either a high or low level.

ON - Mic Level, OFF - Line Level.

Switch 2 - Not Used



Fig 1. Redback® A 4952 Transmitter

RJ45 cabling configuration for system components (568A 'Straight through')

Components are connected using "pin to pin" configuration RJ45 data cabling as shown in figure 3. When installing ensure all connections are verified with a LAN cable tester before switching any system component on.

Failure to follow the correct wiring configuration may result in damage to system components.



Fig 2. Redback® A 4953 Transmitter Wallplate

568A
Straight Through
(both ends)
Pins Face Upwards

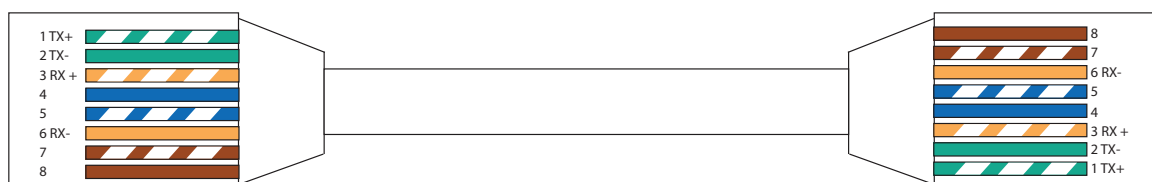


Fig 3. RJ45 Pin to Pin Wiring Diagram