


## **Instruction Manual**

### **Car Jumpstarter with QC/Qi Charging**

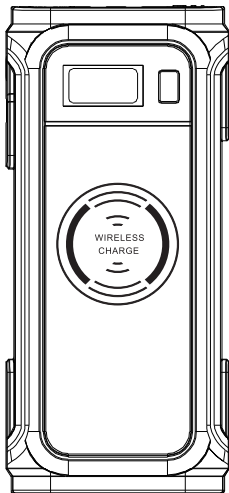

#### **Features**

**Power Bank**

**3 mode Torch**




**Two USB Ports**

**Intelligent battery clamps**

**Wireless Charging**

**Portable Size**

# Product Diagrams

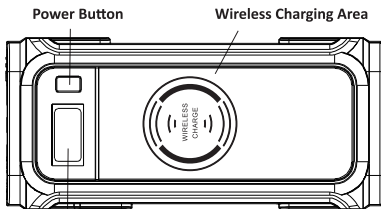

## Overview

A complete automotive rescue kit for the car boot. The Lithium battery pack provides jump start for 12V vehicles, whilst the intelligent protection clamps can provide short circuit protection, over charge protection, over discharge protection, etc. The battery bank has a capacity of 44.4Wh, 4Ah/11.1V (equivalent 12000mAh @ 3.7V). Two USB ports provide charging for your devices as well as the wireless charge feature for compatible smart phones. A multi-adaptor lead of the following; Apple Lightning, micro USB, USB C and mini USB, has been included to suit the users charging needs. The built-in LED torch features 3 modes; flashlight, strobe and SOS. The jumpstarter comes with a variety of accessories all contained in a protective case.

## Specifications

Capacity: .....	44.4Wh
Peak Current: .....	850Amps
USB Type-C Input: .....	9V/2A
USB 1 Output: .....	5V/2.1A
USB 2 Output: .....	9V/2A (Quick Charge)

## Starting the Jumpstarter


To turn on the jumpstarter press the power button once located on front of device.

## Turning off the Jumpstarter


To turn off the jumpstarter hold down the power button for 5 seconds.

## Charging the Jumpstarter

You can charge the jumpstarter by using either step 1 or step 2. Charging takes 3-5 hours using either step.

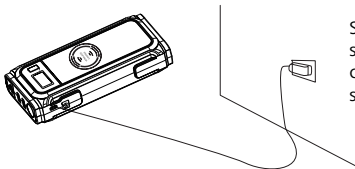

Step 1: Using supplied mains charger in wall socket.

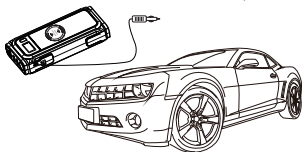


Step 2: Using the included car charger in your cars cigarette lighter.

Please Note: In step 2 the jumpstarter will only be charged at 9V/2A if the cigarette lighter supports it. Otherwise it will be charged at 5V/2A.

## Charging Indicator

1. Press power button once to see charge status on LCD screen.
2. Whilst charging the LCD screen will show the specific number range from 0% to 100%.
3. The input function will stop once the jumpstarter is fully charged.

## Charging devices via USB

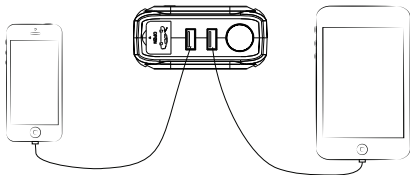

- If using the included multi-adaptor lead or your own USB cable, please ensure you select the right connection for your device.
- Plug USB lead into the 2 USB ports, shown in example above.


## Wireless Charging

Before starting please ensure your phone is Qi charging compatible. If your device doesn't support this it will not charge.

How to charge:

1. Press the power button
2. Place your device on the stated wireless charging area
3. Your device should start charging if not its either not compatible or it just needs to be moved around on jumpstarter until it charges.

Step 2

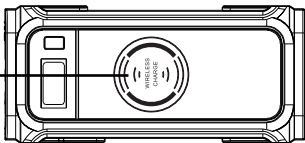

## How to use the LED Torch

1. Turn on: Double press the power button
2. Strobe Function: Once torch is on press power button again
3. SOS Function: Once strobe is on press power button again
4. Turn off: Press power button after SOS to turn off

Double press the power button,  
LED light will turn on.



## Starting your Vehicle

*Please ensure your jumpstarter is no less than 50% charged.  
If it is below 50% you may not be able to jumpstart your vehicle.*

1. Connect the jumper lead to your jumpstarter
2. Connect the +(red clip) to the + on your car battery
3. Connect the -(black clip) to the - on your car battery
4. Turn your key to start your vehicle
5. Once your vehicle is started, disconnect the alligator clip as soon as possible.

### Please Note:

1. After starting your vehicle please remove the jumpstarter as soon as possible
2. DO NOT connector the 2 alligator clips together
3. DO NOT disassemble the jumpstarter

## Trouble Shooting

Trouble	Cause	Solution
Power button isn't turning on jumpstarter	When this occurs the likely cause is that the jump starter is flat	Please charge jumpstarer using either step 1 or step 2 on page 4.

*If you have any other issues with jumpstarter please contact the store you purchased the product from.*

## **WARNING!**

1. After starting your vehicle, remove the jump starter as soon as possible
  2. DO NOT connector the 2 alligator clips together
  3. DO NOT disassemble the jumpstarter
- DO NOT USE PRODUCT IN BATHROOM OR OTHER DAMP/WET PLACES
  - DO NOT REMODEL OR DISMANTLE THE DEVICE
  - KEEP THE PRODUCT AWAY FROM CHILDREN
  - DO NOT REVERSE THE CONNECTIONS OF OUTPUT OR INPUT
  - DO NOT THROW THE PRODUCT INTO FIRE
  - DO NOT USE A CHARGER WITH HIGHER VOLTAGE THEN JUMPSTARTER REQUIRES
  - DO NOT HIT OR THROW THE PRODUCT
  - KEEP THE PRODUCT AWAY FROM FLAMMABLE OBJECTS (BEDS, CARPETS ETC.)
  - IF ANY LIQUID FROM DEVICE SPLASHES IN EYES, DO NOT WIPE BUT WASH WITH CLEAN WATER IMMEDIATELY
  - IF PRODUCT IS HEATING/DISCOLOURING PLEASE STOP USING AS MAY LEAD TO LIQUID/SMOKE/BURN.
  - ENSURE TEMPERATURE IS BETWEEN 0°C - 40°C WHILST DEVICE IS CHARGING
  - AFTER LONG TERM STORAGE OR NOT IN USE PLEASE ENSURE THAT DEVICE WILL BE CHARGED EVERY 3 MONTHS.



Altronic Distributors warrants this product for 12 months from date of purchase from Altronics or its resellers to the consumer. If this item is part of an installation or another product, please contact the installer or supplier for your warranty.

During the warranty period, we undertake to repair or replace your product at no charge if found to be defective due to a manufacturing fault. The warranty excludes damage by misuse or incorrect installation (i.e. failure to install and operate device according to specifications in the supplied instruction manual), neglect, shipping accident, or no fault found, nor by use in a way or manner not intended by the supplier.

**For repair or service please contact your PLACE OF PURCHASE.**

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

**NOT FIELD SERVICEABLE.**

Distributed by Altronic Distributors Pty. Ltd.

Phone: 08 9428 2199

Internet: [www.altronics.com.au](http://www.altronics.com.au)