

SB-5688CK

8x8 HDMI-HDBaseT Over Single CATx Matrix Routing Switch



PRO MATRIX HDMI HDBASET

Inputs : 8x HDMI (Digital Video TMDS, and Digital Audio)

Outputs : 8x HDMI , 8x HDBaseT Transmitter (8x HDBaseT, 8x RS232 in/out and 8x IR in/out)




Ear Rack: 2U-440L

02

INTRODUCTION

The SB-5688CK is professional 8x8 matrix routing switch. Supporting eight (8) HDMI Inputs. Output supported (8) HDMI and 8 HDBASET (PoE). The SB-5688CK is based on the HDBaseT standard and supports full resolution HDMI Video with embedded EDID and PoE function, Audio, RS-232, Ethernet and bi-directional IR, all over a single CATx cable. With a signal bandwidth of 340Mhz, there is no signal degradation. High Definition Digital signals can be selected and distributed to any (8) Inputs to (16) outputs simultaneously (channel outputs mirrored). The Switcher is certified as being fully CEC , ARC and HDCP 2.0 compliant, full HD 4K2K HDMI V1.4a 3D formats, data rates up to 6.75 Gbps. Supports UXGA/WUXGA/DVI 1920x1200 resolution to any HD displays. The SB-5688CK has 1x HDMI and Auxiliary Audio (analog stereo audio) connector for Input, effectively making this an 8 in x16 out switcher (same signal on both outputs). Using IR remote the switcher's HDBaseT Extender Transmitter (Tx) allows you to connect a source in a remote location. Likewise, the HDBaseT Output and our HDBaseT Receiver allows you to connect a display in a remote location. The EDID management can be selected between seven (7) different modes. Control is provided via Front panel push buttons, IR remote, RS-232 or TCP/IP (not a web-browser). An RS232 Windows GUI interface is provided for matrix routing control (Windows only).

SB-5688CK HDMI CAT5e/6 MATRIX SWITCHER 8x8

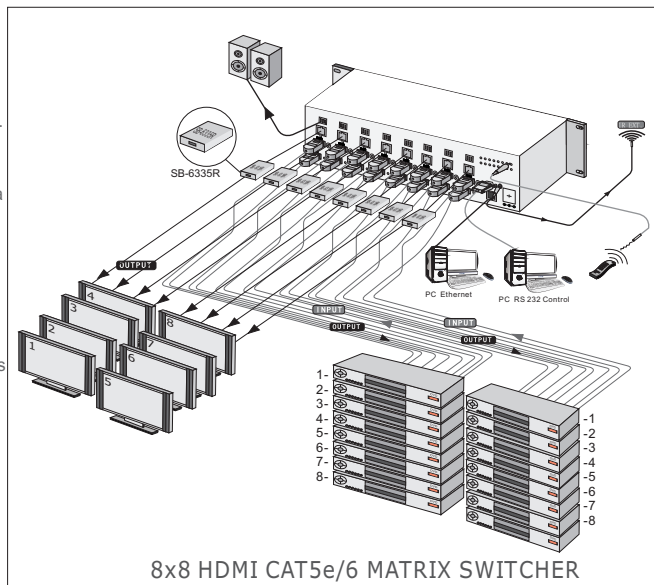

8x8 HDMI CAT5e/6 MATRIX SWITCHER

FEATURES

- (8)x HDMI player devices matrix switched to (8)x HDMI and (8)x HDBaseT Transmitter with PoE output to (8)x destinations.
- Application HDBaseT Specification with PoE, IR, RS-232, Multi Audio Format and HD Video Signals over one CATx (6/6a/7) category cable.
- HDMI digital video w/embedded HDCP, DVI format and CEC/HDCP 2.2 compliant
- Worldwide control EDID modes for HDMI 4K2K (24/30 Hz) HD Video resolutions.
- Link speeds of up to 6.75 Gbps (link clock rate of 340MHz), Support HDMI 4K2K, 1.4a 3D formats.
- Wide range of HD resolutions from PC XGA to WUXGA 1920x1200 and HDTV/DTV HDMI resolutions
 - 7. 480i/480p, 576i/576p, 720p, 1080i/p & 4K2K (24/30Hz).
- Digital Video TMDS formats Resolution up to 4K2K with Deep color 36-bit.
- Digital Audio Support :
 - Dolby TrueHD,
 - Dolby Digital,
 - Dolby Digital Plug/ex,
 - DTS,
 - DTS-HD,
 - DTS-HD Master,
 - DTS-EX
 - PCM, PCM2, LPCM2..
- Audio Input : Support Standard HDMI Multi-Channel Audio (Digital audio).
- Audio Output : Support Standard HDMI Multi-Channel Audio (Digital audio).
- Various User Interface controls:
 - Windows based GUI control via RS232 port
 - Front Panel push button
 - IR wireless remote controller
 - Ethernet Switch control
 - Third party RS232 controller (via simple ASCII)
- Support world wide (7)x control function keys:
 - Full function front panel controls: ALL / OFF / EDID / LOCK / RECALL / MEMORY / ENTER
- Support EDID modes:
 - a. Embedded EDID modes :
 - FSSI/H24-3D/ H24-3D-M/ H36-3D/ H36-3D-M/ 4K2K-3D / DVI-D 1920x1200-60Hz
 - b. External modes : Learning mode.
- Automatic scanning input & output status via LCM show on front panel.
- Support IR Remote and IR Extender with distance up to ~ 984 feet (300M) Maximum.
- Support Universal power adaptor AC100V~240V, 50/60Hz.

SPECIFICATIONS

- Type of HDMI Switcher : 8x inputs To 8x Outputs HDMI-HDBaseT Matrix Switch
- HDMI Support: HDMI 4K2K, 1080P-@60Hz, H36-bit Deep color, 3D of HDMI V1.4 formats.
- HDBaseT Support : HDBaseT Support : bi-directional IR, RS-232, Multi format Audio over one CATx cable.
- HDCP / CEC Support : HDCP 2.2 Compliant, CEC Compliant.
- Video Bandwidth : Double Data Rates: 340Mhz, Total 6.75Gbps bandwidth.
- Digital Video Support : HD:480i/ 480p/ 720p/ 1080i/p and 4K2K up to 36bit deep color
- Video Input : 8x HDMI (HDMI or DVI digital source).
- Video Output : 8x HDMI (To Destination).
- Audio Output : 8x HDMI : Multi Audio Formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)
- HDBaseT Control in:
 - 8x IR in (Send IR signals To 8x Rooms via HDBaseT Transmitter)
 - 1x ALL IR in (Send IR Signals To 8x Rooms - Via HDBaseT Transmitter)
 - 8x IR out (Link to Receive IR signals from 8x Rooms via HDBaseT Extender)
 - 1x ALL IR out (Link to Receive IR signals from 8x Rooms via HDBaseT Extender)
- HDBaseT Control out : 8x RS-232 I/O (Control 8x Rooms RS-232 via Switcher HDBaseT Extender Tx)
- Switch Controls:
 - 1x Select & Function buttons on front panel (Data status via LCM panel show out)
 - 1x IR Remote Controller (switch control)
 - 8x IR Room Remote Controller (switch control)
 - 1x IR External port (switch control via 3.5mm OD Jack)
 - 1x RS 232 series interface (switch control)
 - 1x Ethernet series interface (switch control)
- Source Status: Input status LEDs indicates presence of a live signal.
- (23) Function Control Keys: 1.ALL, 2.OFF, 3.RECALL, 4.ENTER, 5.MEMORY, 6.LOCK, 7.EDID, 8.Destination button (1) thru (8), 9.Source button (1) thru (8).
- (8) EDID management :
 - Select Embedded EDID modes :
 - Fast Speed Start®, H24-3D, H24-3D-M, H36-3D, H36-3D-M, 4K2K-3D, PCM-2CH, DVI-D 1920x1200-60Hz,
 - Select LEARNING mode :
 - Learning Destination EDID To Link Source.
- Infrared Frequency: 38 KHz
- IR External Distance: ~984 feet / 300 meters maximum.
- HDBaseT Extend Distance:~328 feet / 100 meters maximum.
- HDMI I/O Connector: HDMI Type A - SMD 19pin Female Type
- Temperature: Operating Temperature 32 F - 100 F (0 C - 32 C)
- Dimensions: LxWxH=19" x 9.85" x 3.46"(482mm x 250mm x 88mm)
- Rack Mount: 2RU High 19" Rack Mount #2U-440L (with rack mount)
- Power Supply: AC 100~240 VAC 50/60Hz (Power Consumption:10A Maximum)
- Safety Approvals: CE, FCC, REACH.
- Product Weight: 3.75 Kgs / 6.25 lb