

USER'S MANUAL


I. GENERAL

The NP-9605 & the NP-9615 DC Regulated Power Supplies are completely solid state, compact, well regulated, constant voltage power supply suitable for service field, hobby & telecommunication equipment use. They provides three different voltages output for different usage.

II. FEATURES

1. Overload and Short Circuit Protection: Prevent the unit from overload and short circuit. When the unit is under the condition of overload or short circuit, the output current will be limited.
2. Independent 5V, 12V Easy Snap-On output terminals to make it easy to use for TTL and CMOS circuit testing. The grounding of the output terminals is independent that the output can be connected in series to make a higher output voltage.

III. FRONT AND REAR PANELS

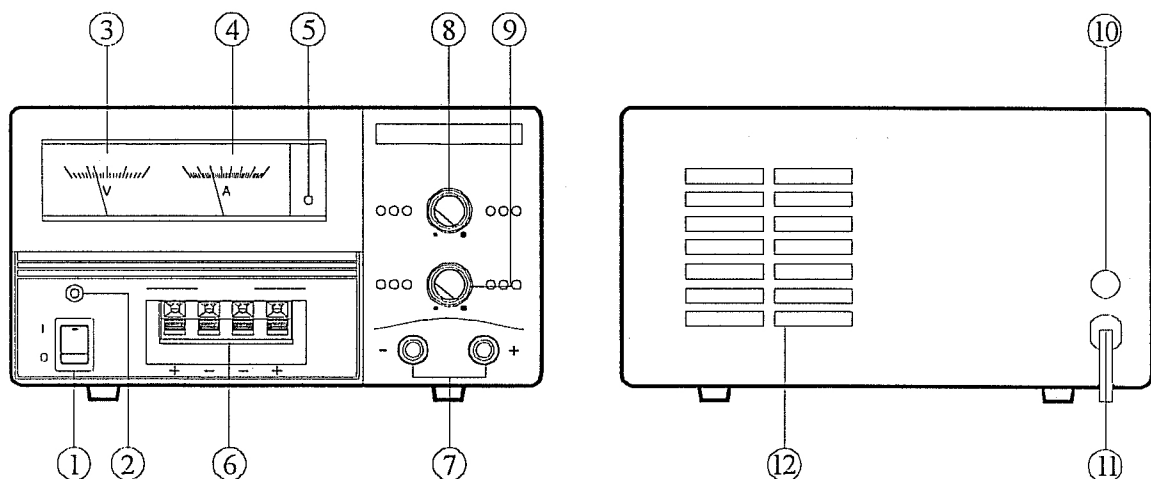

1. ON/OFF Switch
2. Power Indicator
3. Voltmeter
4. Ammeter
5. Current Limited Indicator
6. Easy Snap-On Output Terminals

7. Screw-On Output Terminal
8. Voltage Adjustment Knob
9. Current Adjustment Knob
10. Fuse Holder
11. Power Cord
12. Cooling Fan Air Outlet

IV. OPERATION

A. Installation:

1. Place the unit in a location where allows free air circulation.
2. **DO NOT** place the unit in high humid, dusty and/or sunshiny places.
3. Put the unit horizontally for accurate meters' readings (for NP-9605 only).
4. The input power source must be $\pm 5\%$ of the rated input voltage.

B. Caution:

1. **DO NOT** use the unit for equipment that requires higher current ratings than the unit is designed for, otherwise damage could occur to the unit.
2. **DO NOT** replace the fuse before ceasing the problems and assigned value of fuse must be used in place.

C. Safety Precautions:

The following precautions **MUST** be read carefully to prevent from electric shock.

1. **NEVER** remove the metal cover of the power supply while power source is connecting.
2. **NEVER** touch the power supply when your hand is wet.
3. **NEVER** operate the power supply if foreign materials such as metallic objects, water or other debris have fallen inside. Contact your dealer for check and repair.
4. **NEVER** operate the unit that was being damaged. As the voltage regulation circuitry may have been disabled, the resulting high DC voltage could cause damage to your equipment.
5. **NEVER** allow foreign objects to touch the output terminals.
6. If you have the need to inspect the interior of the power supply, be contained to let it cool down completely, as some components may be hot enough to burn your hands in event of component failure (People other than professions are not recommend to check the interior yourselves.)
7. **NEVER** block the cooling fan air outlet.

D. Connection and Operation:

1. Turn ON the unit and adjust the unit to suitable output voltage.
2. Turn OFF the unit and the equipment.
3. Connect the equipment to the unit. Positive polarity to red (+) and negative polarity to Black (-).
4. Turn ON the unit first and then turn ON the equipment.
5. When an operation is finished, turn OFF the equipment first and then turn OFF the unit.

V. SPECIFICATIONS

	NP-9605	NP-9615
OUTPUT VOLTAGE:	0-30Vdc	
OUTPUT CURRENT:	5A	
FIXED OUTPUT:	5V/0.5A and 12V/0.5A	
RIPPLE & NOISE:	5mV _{r.m.s.}	
LINE REGULATION:	5mV	
LOAD REGULATION:	20mV	
POWER SOURCE:	230Vac/50Hz~ (or on request)	
METERS TYPE:	Analog	Digital LCD
DIMENSION:	205 × 115 × 280 (mm)	
WEIGHT:	Approx. 6.5Kg	